
Assembly Accessories

31/10/2026

PEMSAband Inside Hanging Plate (Ref: 70132220)



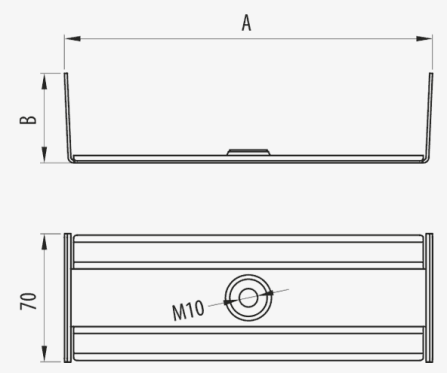

Description

Inside Suspension for Pemsaband® tray. Width 200 mm, With GC protection system. M10 threaded rod fixing that is concealed inside the tray. Attachthe rod to the tray by means of an integrated thread. Available in different sizes and Protection Systems.

Advantages

Available in widths from 100 to 400 mm and in different protection systems: PG and GC

The support is concealed inside the tray giving an aesthetic appearance of the trays.

Easy and quick to install.

To connect the suspension to the tray, use the Pemsaband® M6 Joining Kit.

For ceiling mounting with M10 rods. No need for any additional nuts as the plate has an integrated thread.

Applications

Recommended for ceiling installation of Pemsaband® trays, concealing the suspension inside the tray. Suitable for the management of cables in electrical and telecommunications installations in public buildings, commercial centres or other buildings with a highly aesthetic component.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PEMSAband Inside Hanging Plate (Ref: 70132220)

Product data

ETIM 10	EC001003	**u**	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,661	**Material**	Steel with surface coating
Protection System	GC	**SWL (kg)**	27
Finish	Zinc Nickel	**Working temperature range (°C)**	-50 / 150 °C
Resistance Class	Class 8	**Fire resistance**	A1 No combustible
Flange (mm)	60		
Width (mm)	200		
kg/u	0,255		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PEMSAband Inside Hanging Plate (Ref: 70132220)

Product applications

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."