


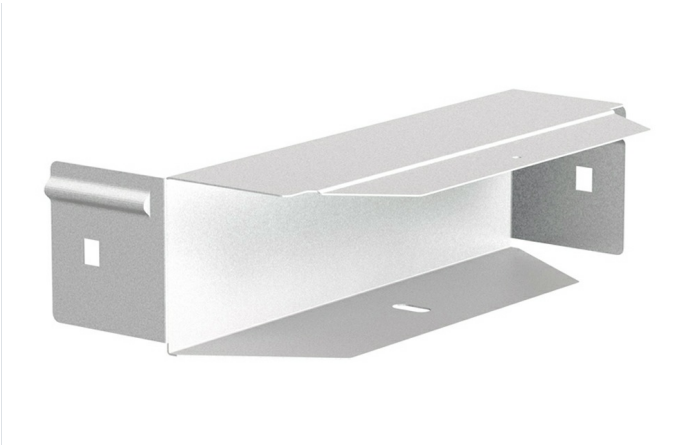

Description

Width 200 mm, With AZ+ protection system, ZM finish

Advantages

Applications

Solutions



## Product data

|                                              |                          |                                       |                            |
|----------------------------------------------|--------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC001574                 | <b>u</b>                              | 1                          |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 1,041                    | <b>Material</b>                       | Steel with surface coating |
| <b>Protection System</b>                     | AZ+                      | <b>IP</b>                             | IP44                       |
| <b>Finish</b>                                | ZM High Resistance Alloy | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Resistance Class</b>                      | Class 8                  | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Flange (mm)</b>                           | 100                      |                                       |                            |
| <b>Width (mm)</b>                            | 200                      |                                       |                            |
| <b>kg/u</b>                                  | 0,322                    |                                       |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product applications





