


Shoulder Screw M6x12 (Ref: 67060100)

1/2

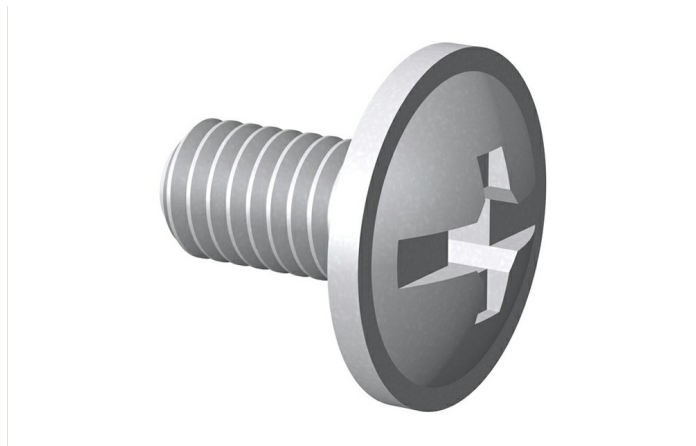

Description

DIN603 semi-spherical metal bolt for fixing and attaching straight lengths of Pemsaband® tray, supports and other accessories, avoiding any damage to the cables when they are laid in the trays. M 6, M 6, With INOX protection system, I316L finish. Suitable for Pemsaband® trays of 35, 60 and 85 mm in height.

Advantages

CE conformity to directive 2014/35 / EU.

Available in sizes: M6x12 and M6x20.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It avoids damaging the cables when they are laid in the trays. The head is embedded in the embossing of the Pemsaband® trays.

Used for the joining of straight sections and any accessory of the Pemsaband® One perforated, solid, Pemsaband® PQU and PQW ranges.

Applications

Suitable for the fixing of straight sections, accessories, bends, tees and supports for installations of Pemsaband®, Inducanal® and Pemsaband® PQ metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works , industrial facilities and tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Shoulder Screw M6x12 (Ref: 67060100)

2/2

Product data

ETIM 10	EC003861	kg/u	0,007
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System	INOX	Material	Acero inoxidable AISI 316L
Finish	Stainless Steel AISI 316L	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9D	Fire resistance	A1 No combustible
M/PG	M 6		
G (mm)	20		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

