


Assembly Accessories

Rejiband Pemsaband Coupler

DATA SHEET

19/04/2024 1/2

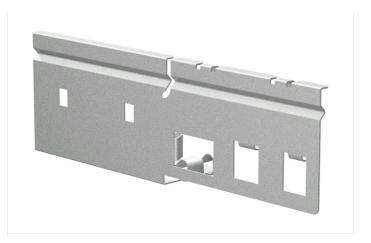

Description

Assembly of different sections of Pemsaband® and Rejiband® trays. Metal joint pieces, in various protection systems, that allow the joining of different sections of Pemsaband® trays and Rejiband® wire mesh tray whilst maintaining the guarantee of electrical continuity, according to IEC 61537. It is mounted on the flange of both trays and is fixed by the Quick-connect Click system on the wire mesh tray and with nuts and bolts in the sheet metal tray.

Advantages

It enables the joining of different types of wire mesh and sheet trays.

Complete view of the whole installation.

Prevents damage to the cables when making the joint.

Electrical continuity guaranteed according to standard IEC61537.

Available in PG and GC protection systems.

Applications

Used in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations and in the tertiary sector.

Solutions



EG M/E-1 🎬 🖻 😁 🖪 (6 📟 E90

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

pemsa

Assembly Accessories

19/04/2024

Rejiband Pemsa	band Coupler		2/2
Main technical characte	eristics		
😚 1 🛛 🔞 Steel with surfa	ace coating 😻 -50 / 150 °C	ETIM	
Product data			
S	Cass EC 61537	Ref	kg/u
PG	Class 3	70120200	0.195
GC	Class 5	70130200	0.218
S Protection System			
CU - Copper electroplated			
PG - Pregalvanised			
EZ - Electrogalvanised			
3C - Electrogalvanised Bichromate			
3K8 - High Resistance Coating			
GC - Hot Dip Galvanising			
NOX - Stainless Steel			
PT - Polyester Paint			
AL - Aluminum			
LN - Brass or Nickel-plated brass			
℗ Insulating materials			
PC+ABS - Halogen Free Polycarbonate + ABS			
PVC - Polyvinyl Chloride			
PP - Halogen Free Polypropylene			
PA6 - Halogen Free Polyamide 6			
PA12 - Halogen Free Polyamide 12			
PU - Polyurethane			
PE - Polyethylene			
NBR - NBR rubber			
PET - Thermoplastic Polyester			
TPV - Thermoplastic			



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

155 MAVE-1 😫 🖻 👄 🖪 (E 🐖 E90