
Internal Joint



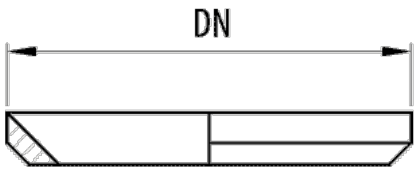

Description

Internal thermoplastic washer in white available in various sizes for internal installation in polyamide fittings of the Pemsaflex® range. It improves the seal and achieves IP67.

Advantages

Improves the tightness of the fitting on the conduit, reaching IP67.

Available in white.

Working temperature: -25°C to + 105°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of thermoplastic.

Applications

Suitable for installation inside polyamide fittings of the Pemsaflex® range, to improve the seal.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Internal Joint

Main technical characteristics

Colour White RAL 9010 | DN NW 7, NW10, NW12, NW17, NW23, NW29, NW36, NW48 | kg/u 0,001 | Thermoplastic Polyester | IP67

-25 / 105 °C | Flame retardant | ETIM 10 EC001181

Product data

DN	Ref	
NW 7	39091000	50
NW10	39091100	50
NW12	39091200	50
NW17	39091400	50
NW23	39091500	30
NW29	39091600	30
NW36	39091700	10
NW48	39091800	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."