
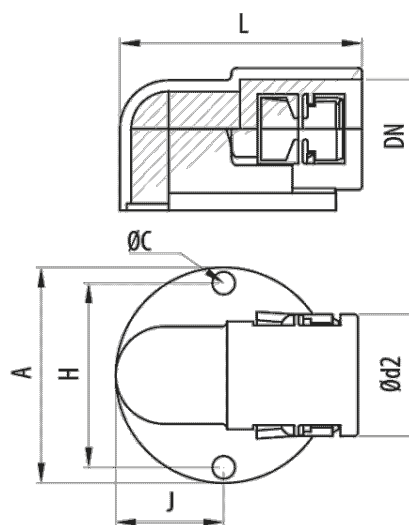


AB 90° Connector (Ref: 32050400)

1/2

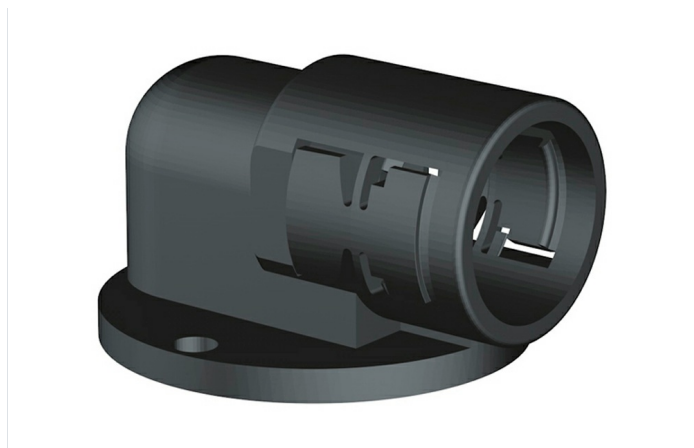

Description

90° angle connector made from self-extinguishing polyamide 6 in RAL 7011 grey or RAL 9005 black, metric and PG thread, halogen-free, flame retardant and an IP54 protection rating. The AB 90 connector is suitable for the installation of Pemsaflex® LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits where it is necessary to create a 90° angle in small spaces.

Advantages

Suitable for conduit assemblies creating 90° angles in tight spaces. It has a fixing base with four holes.

UL and CSA certification. CE conformance with the 2014/35 directive and the IEC 61386 standard. Halogen-free according to EN 50267-2-1 standard. In accordance with standard EN 60204-1 (machine safety).

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Click connection system that allows easy and fast coupling to the conduit.

Working temperature: -25°C to + 105°C. Degree of protection IP54 according to classification EN60529.

Applications

Suitable for the connection of Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots , vehicles and special facilities.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001176	J (mm)	22.5
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,016
Colour	Black RAL 9005	u	30
DN	NW17	Material	Polyamide 6
Ø d2 (mm)	27	IP	IP54
L (mm)	51	Working temperature range (°C)	-25 / 105 °C
A (mm)	45	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø C (mm)	5.5		
H (mm)	35.5		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic