


Straight Connector

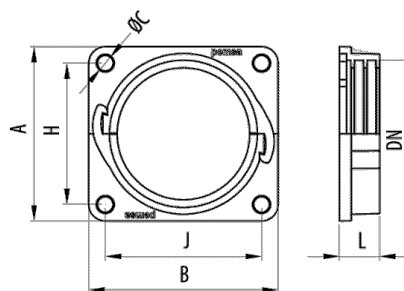

Description

Straight connector with surface fixing ring made of self-extinguishing polyamide 6, halogen-free in grey RAL 7011 and black RAL 9005. Available in various diameters. Formed by two pieces and assembly is with the click system without the need for screws. It allows the rotation, but not any axial movement. Suitable for large diameter Macroflex® conduits.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

It has a fixing ring with four holes for attaching the conduit to a flat surface.

Formed by two pieces and assembly with click system without the need for screws. It allows the rotation, but not any axial movement.

Working temperature: -25°C to + 105°C. Degree of protection IP54 according to classification EN60529.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions



Straight Connector

Main technical characteristics

COLOUR Grey RAL 7011, Black RAL 9005	DN NW52, NW70, NW95	C_{mm} 6.5	10	M Polyamide 6	IP IP54	°C -25 / 105 °C
LIBRE DE HALÓGENOS, NO PROPAGADOR DE LA LLAMA		ETIM 10 EC001176				

Product data

COLOUR	DN	L _{mm}	A _{mm}	B _{mm}	H _{mm}	J _{mm}	Ref	kg/u
Grey RAL 7011	NW52	17	74	77	60	66	33010052	0,023
Grey RAL 7011	NW70	21	103	103	61	81	33010070	0,024
Grey RAL 7011	NW95	28	130	130	74	109	33010095	0,044
Black RAL 9005	NW52	17	74	77	60	66	33050052	0,023
Black RAL 9005	NW70	21	103	103	61	81	33050070	0,024
Black RAL 9005	NW95	28	130	130	74	109	33050095	0,026

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

