


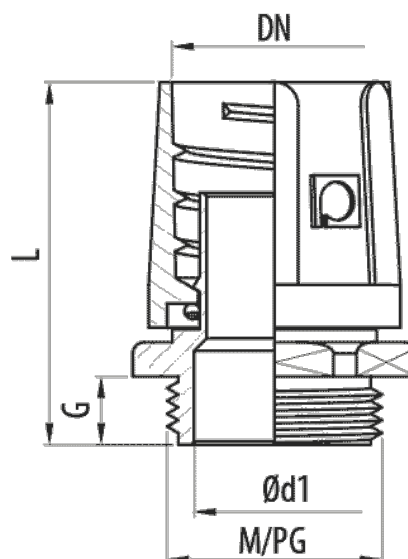

Description

Rotating metal connector with nickel-plated brass inner sleeve and self-extinguishing polyamide 6 insulating outer body for the connection of metal flexible conduits with or without plastic coating, type TM, Ecoflex®, TM-PVC. for DN29 mm. IP65 protection index. Available in various sizes in both metric and PG threads.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has an independent rotating body that allows the connection of the fitting to the conduit for later connection to the box. The inner metal bush provides electrical continuity of the installation.

Made of brass with external body in polyamide 6, self-extinguishing and halogen-free.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



Product data			
ETIM 10		EC001180	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Nickel-plated brass	
Colour		Grey RAL 7001	
DN		NW29	
M/PG		M40	
G (mm)		10	
Ø d1 (mm)		28.5	
L (mm)		58.4	
kg/u		0,110	
u		10	
Material		LATÓN NIQUELADO,POLIAMIDA 6	
IP		IP65	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic