

RGM Double Connector



Description

Double swivel body metal fitting with nickel-plated brass metal inner bushes for connecting flexible conduits type TM, Ecoflex®, TFA and TM-PVC. Self-extinguishing polyamide 6 insulating outer body. IP65 protection rating. Available in grey (RAL 7035).

Advantages

It has a metal body and inner sleeve, thus facilitating connection with the metal interior of TM-PVC, Ecoflex and TM conduits, maintaining the electrical continuity of the system.

Double body that allows the connection of flexible conduits with a metal body and a plastic cover.

It has an independent rotating body for both sides that allow the connection of the fitting to the conduit for later connection to the box.

CE conformity in accordance to the low voltage directive 2014 /35 /UE and the international and harmonized product standard IEC 61537

Applications

Suitable for connecting TM, TM-PVC and Ecoflex® flexible metal conduits for electrical cable routing for building, service and industrial applications.

Solutions



Main technical characteristics					
LTN	Nickel-plated brass	COLOUR Grey RAL 7001	DN NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48		
LATÓN NIQUELADO,POLIAMIDA 6	IP65	-25 / 105 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC001178	


Product data					
DN	Ø	L _{mm}	Ref	kg/u	kg
NW 7	7.2	48	82002540	0,017	50
NW 9	9.2	52	82002568	0,024	50
NW11	12.2	59	82002569	0,033	25
NW13	14.3	62	82002570	0,040	25
NW16	15.8	64	82002571	0,048	15
NW21	21	76	82002572	0,085	15
NW29	28.5	91	82002573	0,143	5
NW36	37	99	82002574	0,220	4
NW48	49.7	109	82002575	0,272	3

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

RGM Double Connector

Product applications

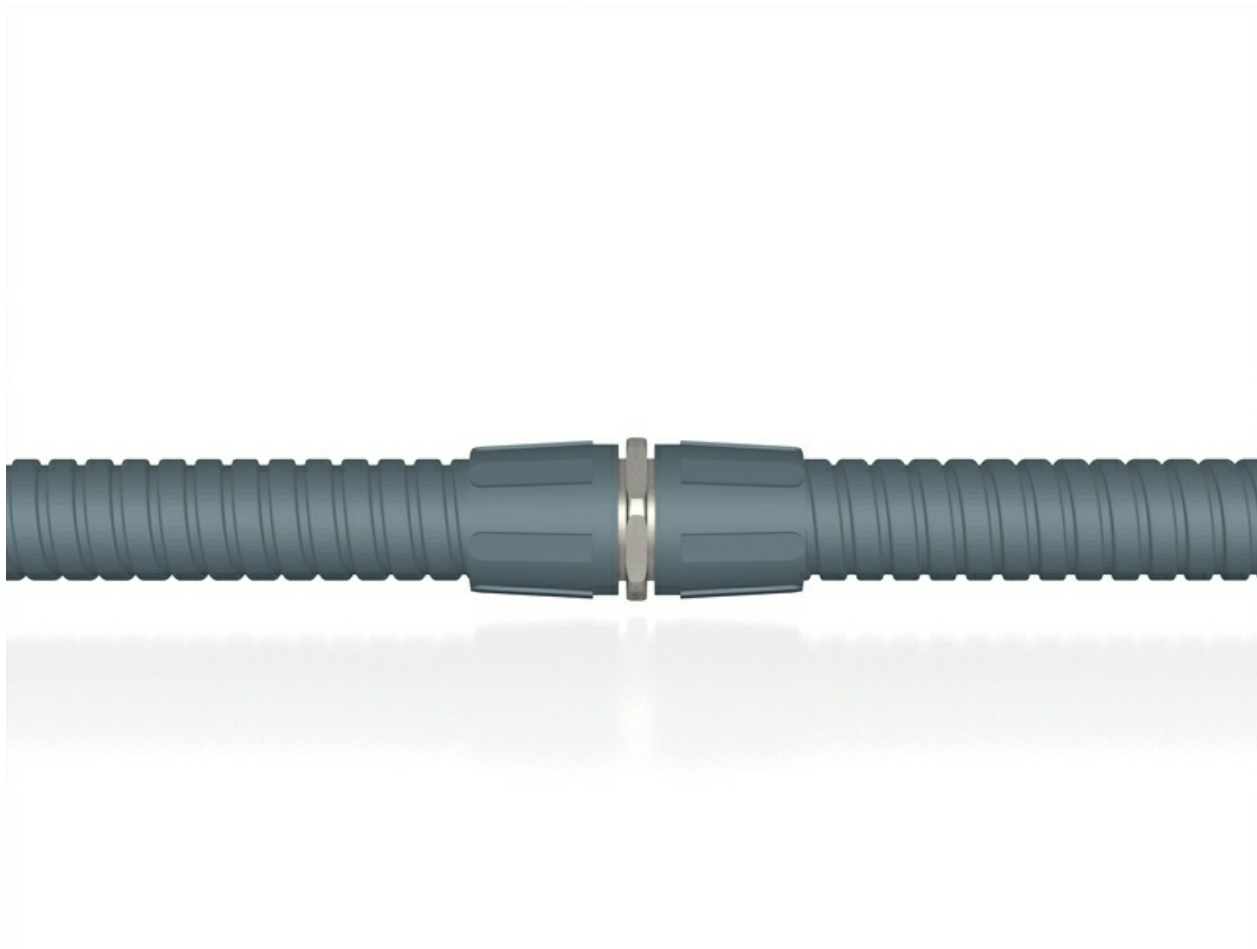

RGM Double Connector

