


RM Connector

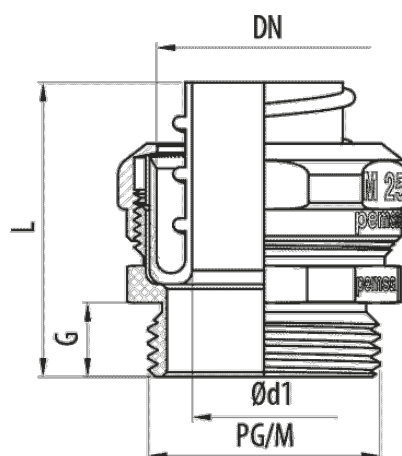

Description

Nickel-plated brass connector with external thread and polyethylene inner sleeve for assembly of TM, Ecoflex®, TM-PVC conduits. IP54 protection index. Available in different sizes of thread in metric and PG.

Advantages

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass with a polypropylene inner sleeve.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



RM Connector

Main technical characteristics

LTN	Nickel-plated brass	DN NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48	
PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63	LATÓN NIQUELADO,POLIPROPILENO		
IP54	-25 / 90 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC001180

Product data

DN				L _{mm}		Ref	kg/u	
NW 7	PG 7	5	7.5	24	18	37020007	0,012	100
NW 9	PG 9	6	9.3	25	20	37020009	0,016	100
NW11	PG11	6.5	12.1	26.1	24	37020011	0,021	100
NW13	PG13	6	13.6	26.1	26	37020013	0,024	50
NW16	PG16	8.5	15.5	31.8	28	37020016	0,029	50
NW21	PG21	8	20.2	33.5	34	37020021	0,045	25
NW29	PG29	9.5	26.7	36.3	45	37020029	0,088	20
NW36	PG36	10	34.8	41	56	37020036	0,174	10
NW48	PG48	15	45	54.8	70	37020048	0,302	5
NW 7	M12	5	7.5	24	18	37021120	0,012	100
NW 9	M16	6	9.3	25	20	37021160	0,016	100
NW11	M20	6.5	12.1	26.1	24	37021200	0,021	100
NW13	M20	7	13.6	27.1	26	37021201	0,025	50
NW16	M25	8	15.5	31.8	28	37021250	0,029	50
NW21	M32	8	20.2	33.5	34	37021320	0,045	25
NW29	M40	8	26.7	36.3	45	37021400	0,085	20
NW36	M50	9	34.8	41	56	37021500	0,168	10
NW48	M63	14	45	54.8	70	37021630	0,292	5

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



RM Connector

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

