


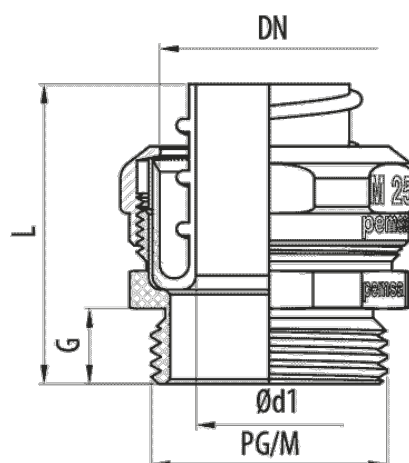

Description

Nickel-plated brass connector with external thread and polyethylene inner sleeve for assembly of TM, Ecoflex®, TM-PVC conduits. IP54 protection index. Available in different sizes of thread in metric and PG.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass with a polypropylene inner sleeve.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



ETIM 10	EC001180	Torque wrench	18
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,012
Protection System	LTN	u	100
Finish	Nickel-plated brass	Material	LATÓN NIQUELADO,POLIPROPILENO
DN	NW 7	IP	IP54
M/PG	PG 7	Working temperature range (°C)	-25 / 90 °C
G (mm)	5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d1 (mm)	7.5		
L (mm)	24		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."