


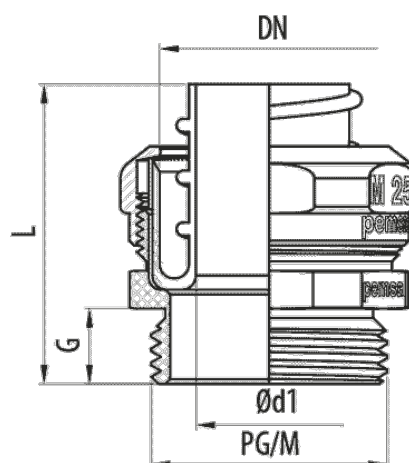

Description

Nickel-plated brass connector with external thread and polyethylene inner sleeve for assembly of TM, Ecoflex®, TM-PVC conduits. IP54 protection index. Available in different sizes of thread in metric and PG.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass with a polypropylene inner sleeve.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



Product data			
ETIM 10		EC001180	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Nickel-plated brass	
DN		NW21	
M/PG		PG21	
G (mm)		8	
Ø d1 (mm)		20.2	
L (mm)		33.5	
Torque wrench		34	
kg/u		0,045	
u		25	
Material		LATÓN NIQUELADO,POLIPROPILENO	
IP		IP54	
Working temperature range (°C)		-25 / 90 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

- Protection System
- CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN
- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

- Insulating materials
- PC+ABS

PVC

PP

PA6

PA12

PU

PE

NBR

PET

TPV
- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic