


RMM Connector

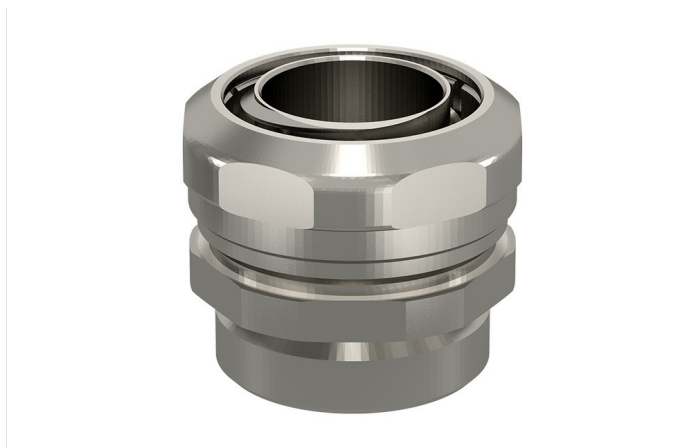

Description

Metal connector with external thread and nickel-plated brass inner sleeve for the assembly of TM, Ecoflex® and TM-PVC conduits. IP54 protection index. Available in various sizes and in metric threads.

Advantages

The inner metal bush provides electrical continuity of the installation.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 150°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



Main technical characteristics

LTN	Nickel-plated brass	DN NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48	
PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63	Nickel-plated brass	IP54	
-45 / 150 °C	A1 No combustible	ETIM 10 EC001180	

Product data

DN				L _{mm}		Ref	kg/u	
NW 7	PG 7	5	8	21.5	18	37025007	0,016	100
NW 9	PG 9	6	9.8	22	20	37025009	0,023	100
NW11	PG11	6.5	12.7	22.5	24	37025011	0,032	100
NW13	PG13	6	14.5	23	26	37025013	0,035	50
NW16	PG16	8.5	16.2	26	28	37025016	0,043	50
NW21	PG21	8	21	28	34	37025021	0,066	25
NW29	PG29	9.5	28.6	31	45	37025029	0,133	20
NW36	PG36	10	37.5	38	56	37025036	0,261	10
NW48	PG48	15	48.8	50	70	37025048	0,467	5
NW 7	M12	5	8	21.5	18	37026120	0,016	100
NW 9	M16	6	9.8	22	20	37026160	0,023	100
NW11	M20	6.5	12.7	22.5	24	37026200	0,032	100
NW13	M20	7	14.5	23	26	37026201	0,036	50
NW16	M25	8	16.2	26	28	37026250	0,043	50
NW21	M32	8	21	28	34	37026320	0,066	25
NW29	M40	8	28.6	31	45	37026400	0,130	20
NW36	M50	9	37.5	38	56	37026500	0,255	10
NW48	M63	14	48.8	50	70	37026630	0,457	5

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene

RMM Connector

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

