
Metal Flexible Conduits Connectors

18/11/2026

RMM Connector (Ref: 37025011)

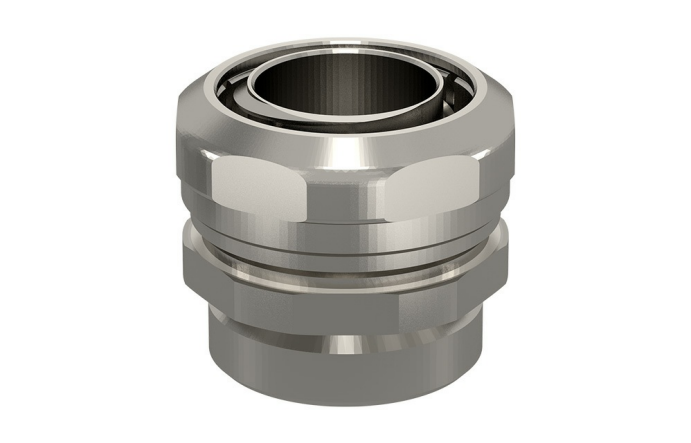

Description

Metal connector with external thread and nickel-plated brass inner sleeve for the assembly of TM, Ecoflex® and TM-PVC conduits. IP54 protection index. Available ir various sizes and in metric threads.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

The inner metal bush provides electrical continuity of the installation.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 150°C.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RMM Connector (Ref: 37025011)

Product data

ETIM 10	EC001180	**Torque wrench**	24
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**kg/u**	0,032
Protection System	LTN	**u**	100
Finish	Nickel-plated brass	**Material**	Nickel-plated brass
DN	NW11	**IP**	IP54
M/PG	PG11	**Working temperature range (°C)**	-45 / 150 °C
G (mm)	6.5	**Fire resistance**	A1 No combustible
Ø d1 (mm)	12.7		
L (mm)	22.5		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."