


RMT Coupler

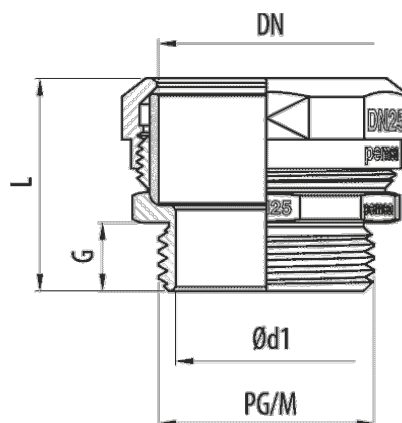

Description

RMT connector for coupling RL conduits to EZ Protection System steel boxes in installations that require high mechanical performance and medium resistance to corrosion. IP54 protection index. It incorporates a threaded end for the RL conduit to enable its connection to a box in conjunction with a TCM nut. Available in various diameters.

Advantages

It has a threaded end for the connection of RL rigid conduit to boxes.

Protection index EN 60529: IP54.

It has an inner seal which provides a degree of protection to IP54.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Applications

Suitable for the connection of RL and RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



Main technical characteristics									
LTN	NW16, NW20, NW25, NW32, NW40, NW50, NW63	M16, M20, M25, M32, M40, M50, M63	LATÓN NIQUELADO,NBR						
IP54	-15 / 90 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA					ETIM 10 EC000939		

Product data									
DN					L _{mm}		Ref	kg/u	
NW16	M16	6	12	18.1	18	24	37031160	0,018	100
NW20	M20	7	14	21.9	20	28	37031201	0,025	100
NW25	M25	8	21	25.5	20	32	37031250	0,033	50
NW32	M32	8	27	32.2	24	40	37031320	0,063	25
NW40	M40	9.5	35	42.2	29	48	37031400	0,098	20
NW50	M50	11	41.2	53	37	60	37031500	0,175	10
NW63	M63	15	63	65.7	47	76	37031630	0,271	5

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic