


RMT Coupler (Ref: 37031250)

1/2

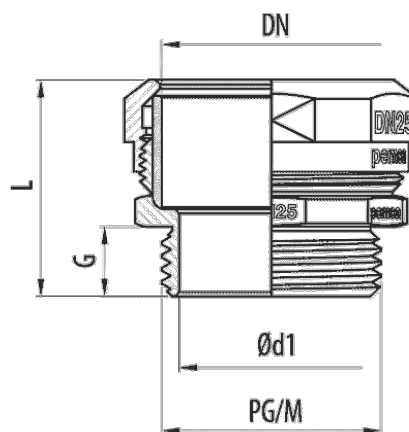

Description

RMT connector for coupling RL conduits to EZ Protection System steel boxes in installations that require high mechanical performance and medium resistance to corrosion. IP54 protection index. It incorporates a threaded end for the RL conduit to enable its connection to a box in conjunction with a TCM nut. Available in various diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has a threaded end for the connection of RL rigid conduit to boxes.

It has an inner seal which provides a degree of protection to IP54.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Applications

Suitable for the connection of RL and RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC000939	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Nickel-plated brass	
DN		NW25	
M/PG		M25	
G (mm)		8	
Ø d1 (mm)		21	
Ø d2 (mm)		25.5	
L (mm)		20	
Torque wrench		32	
kg/u		0,033	
u		50	
Material		LATÓN NIQUELADO,NBR	
IP		IP54	
Working temperature range (°C)		-15 / 90 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic