
RMT Coupler (Ref: 37031400)



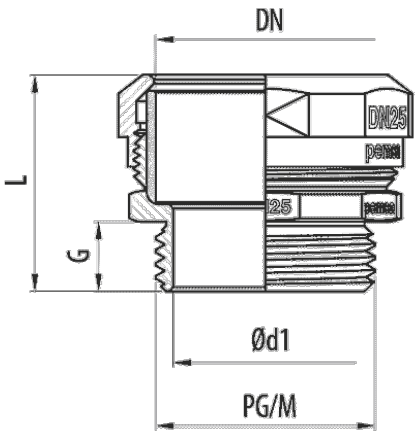

Description

RMT connector for coupling RL conduits to EZ Protection System steel boxes in installations that require high mechanical performance and medium resistance to corrosion. IP54 protection index. It incorporates a threaded end for the RL conduit to enable its connection to a box in conjunction with a TCM nut. Available in various diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has a threaded end for the connection of RL rigid conduit to boxes.

It has an inner seal which provides a degree of protection to IP54.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Applications

Suitable for the connection of RL and RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RMT Coupler (Ref: 37031400)

Product data

ETIM 10	EC000939
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Protection System	LTN
Finish	Nickel-plated brass
DN	NW40
M/PG	M40
G (mm)	9.5
Ø d1 (mm)	35
Ø d2 (mm)	42.2
L (mm)	29

Torque wrench	48
kg/u	0,098
u	20
Material	LATÓN NIQUELADO,NBR
IP	IP54
Working temperature range (°C)	-15 / 90 °C
Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."