
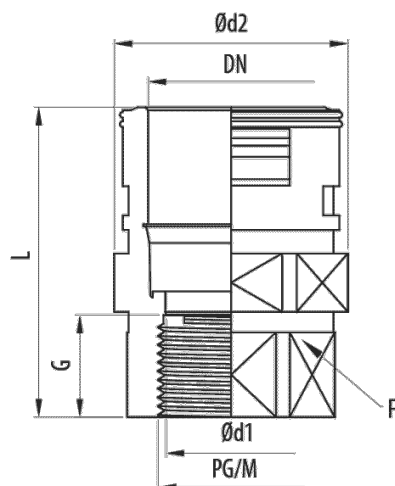


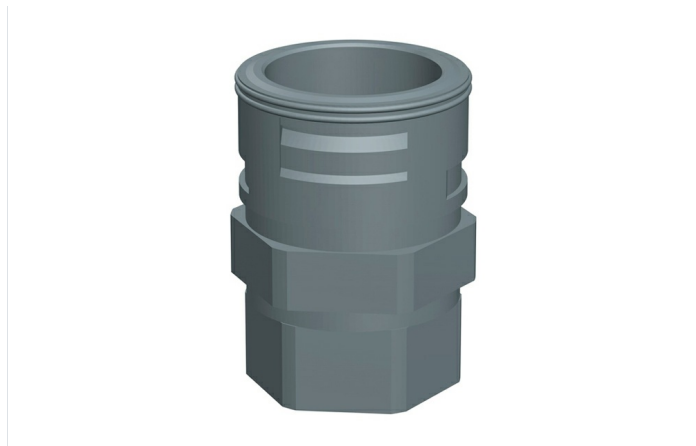

Description

Basic straight connector made of self-extinguishing polyamide 6 with internal thread in RAL 7011 gray or black RAL 9005, metric and PG thread, halogen-free, flame retardant, IP67 protection rating. The RRIP connector is suitable for the installation of Pemsaflex® LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Click connection system that allows easy and fast coupling to the conduit.

It allows the connection, with another straight connection of external thread, for the joining of sections of conduits.

Working temperature: -25°C to + 105°C. Degree of protection IP67 according to classification EN60529.

UL and CSA certification. CE conformance with the 2014/35 directive and the IEC 61386 standard. Halogen-free according to EN 50267-2-1 standard. In accordance with standard EN 60204-1 (machine safety).

Applications

Suitable for the connection of Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots , vehicles and special facilities.

Solutions



Main technical characteristics

COLOUR Grey RAL 7011, Black RAL 9005

PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M16, M20, M25, M32, M40, M50

 Poyamide 6

 IP67

 -25 / 105
°C

 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM
EC001176

Product data

COLOUR	DN							Ref	kg/u	
Grey RAL 7011	NW10	PG 7	12	11	21.1	36.5	17	31110107	0.006	50
Grey RAL 7011	NW10	PG 9	12	11	21.7	35.5	19	31110109	0.006	50
Grey RAL 7011	NW12	PG11	13	13.4	24.8	38.5	22	31110211	0.007	50
Grey RAL 7011	NW12	PG13	11	13.3	27	38.5	24	31110213	0.008	50
Grey RAL 7011	NW17	PG13	13.5	17.2	30.4	40.5	30	31110413	0.012	50
Grey RAL 7011	NW17	PG16	13	17.3	33.2	40.5	30	31110416	0.011	50
Grey RAL 7011	NW23	PG21	14.5	21.7	40	51.5	32	31110521	0.027	30
Grey RAL 7011	NW29	PG29	18.5	30	47.5	56.5	42	31110629	0.028	30
Grey RAL 7011	NW36	PG36	21	38	59.8	65	54	31110736	0.071	10
Grey RAL 7011	NW48	PG48	21	48	73	70	65	31110848	0.091	10
Grey RAL 7011	NW10	M16	12	10.4	21.1	36	19	31111116	0.006	50
Grey RAL 7011	NW12	M16	12	12.9	24	37	19	31111216	0.007	50
Grey RAL 7011	NW17	M20	16	18	30.4	43	27	31111420	0.012	50
Grey RAL 7011	NW23	M25	17	22.5	40	53	32	31111525	0.027	30
Grey RAL 7011	NW29	M32	16.5	30	46	53.5	36	31111632	0.028	30
Grey RAL 7011	NW36	M40	20	38	57	63.5	46	31111740	0.071	10
Grey RAL 7011	NW48	M50	21	48	73	68	60	31111863	0.091	10
Black RAL 9005	NW10	PG 7	12	11	21.1	36.5	17	32110107	0.006	50
Black RAL 9005	NW10	PG 9	12	11	21.7	35.5	19	32110109	0.006	50
Black RAL 9005	NW12	PG11	13	13.4	24.8	38.5	22	32110211	0.007	50
Black RAL 9005	NW12	PG13	11	13.3	27	38.5	24	32110213	0.008	50
Black RAL 9005	NW17	PG13	13.5	17.2	30.4	40.5	30	32110413	0.012	50
Black RAL 9005	NW17	PG16	13	17.3	33.2	40.5	30	32110416	0.011	50
Black RAL 9005	NW23	PG21	14.5	21.7	40	51.5	32	32110521	0.027	30
Black RAL 9005	NW29	PG29	18.5	30	47.5	56.5	42	32110629	0.028	30
Black RAL 9005	NW36	PG36	21	38	59.8	65	54	32110736	0.071	10
Black RAL 9005	NW48	PG48	21	48	73	70	65	32110848	0.091	10
Black RAL 9005	NW10	M16	12	10.4	21.1	36	19	32111116	0.006	50
Black RAL 9005	NW12	M16	12	12.9	24	37	19	32111216	0.007	50
Black RAL 9005	NW17	M20	16	18	30.4	43	27	32111420	0.012	50
Black RAL 9005	NW23	M25	17	22.5	40	53	32	32111525	0.027	30
Black RAL 9005	NW29	M32	16.5	30	46	53.5	36	32111632	0.028	30
Black RAL 9005	NW36	M40	20	38	57	63.5	46	32111740	0.071	10



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management. S.A."



COLOUR	DN							REF	kg/u	
Black RAL 9005	NW48	M50	21	48	73	68	60	32111850	0.091	10

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic