
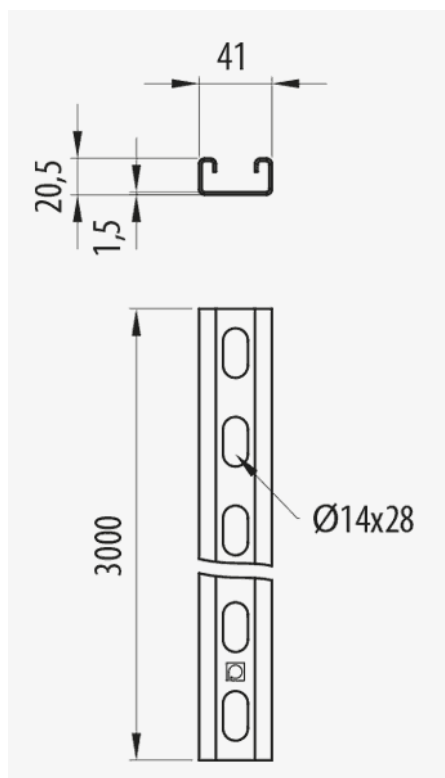


# **Light Duty Channel 41x21** ( Ref: 67030075 )

1/5

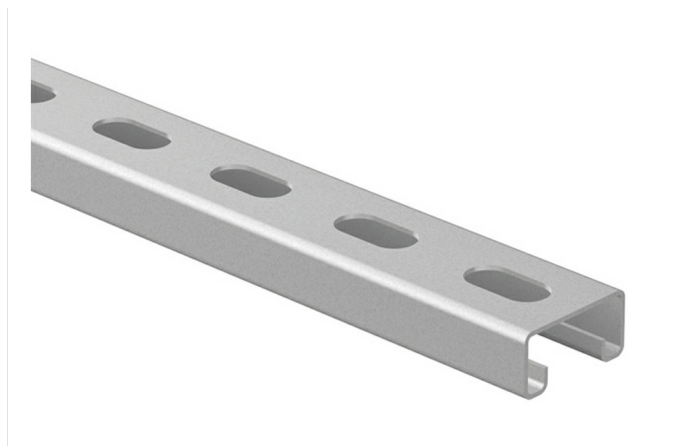

## Description

Metal channel 41x21 mm and 1.5 mm thick for the support of Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder in cable management installations. Of 21 mm height, With 1.5 mm thickness, PG3 finish. It allows the construction of various types of suspended wall and support structures etc. Made of steel and with PG Protection System.

## Advantages

PG protection system, according to BS-EN-10142, suitable for indoor installations in industrial environments. Corrosion resistance class 3.

CE conformity to directive 2014/35 / EU.

It has multiple holes that facilitate the connection possibilities.

It facilitates ceiling installations of sections of tray for cable management.

Versatile way to simplify the installation of horizontal supports.

## Applications

Suitable for the creation of support structures for indoor installations of Rejiband® and Pemsaband® trays and Megaband® ladder in electrical wiring and / or telecommunications in a dry atmosphere without contaminants.

## Solutions



OFFSHORE, PORTS TUNNELS INFRASTRUCTURES



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC000386                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  |                            |  |
| Protection System                     |  | PG                         |  |
| Finish                                |  | PG3, Pregalvanised         |  |
| Resistance Class                      |  | Class 3                    |  |
| Flange (mm)                           |  | 21                         |  |
| Length (m)                            |  | 3                          |  |
| kg/u                                  |  | 1,120                      |  |
| u                                     |  | 3                          |  |
| Material                              |  | Steel with surface coating |  |
| Thickness (mm)                        |  | 1.5                        |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |


| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

**Light Duty Channel 41x21** ( Ref: 67030075 )

**Product applications**

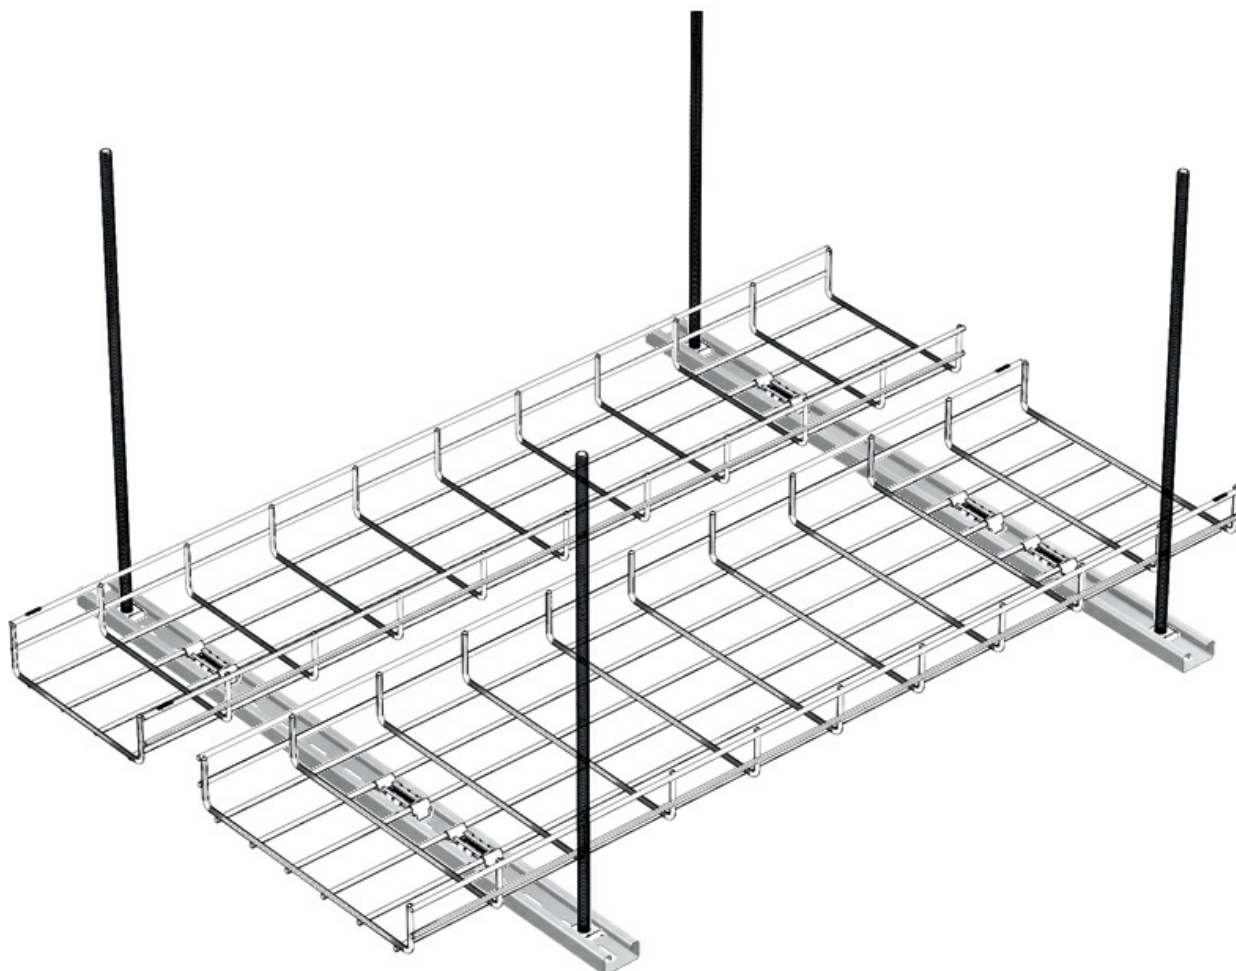

**Light Duty Channel 41x21** ( Ref: 67030075 )

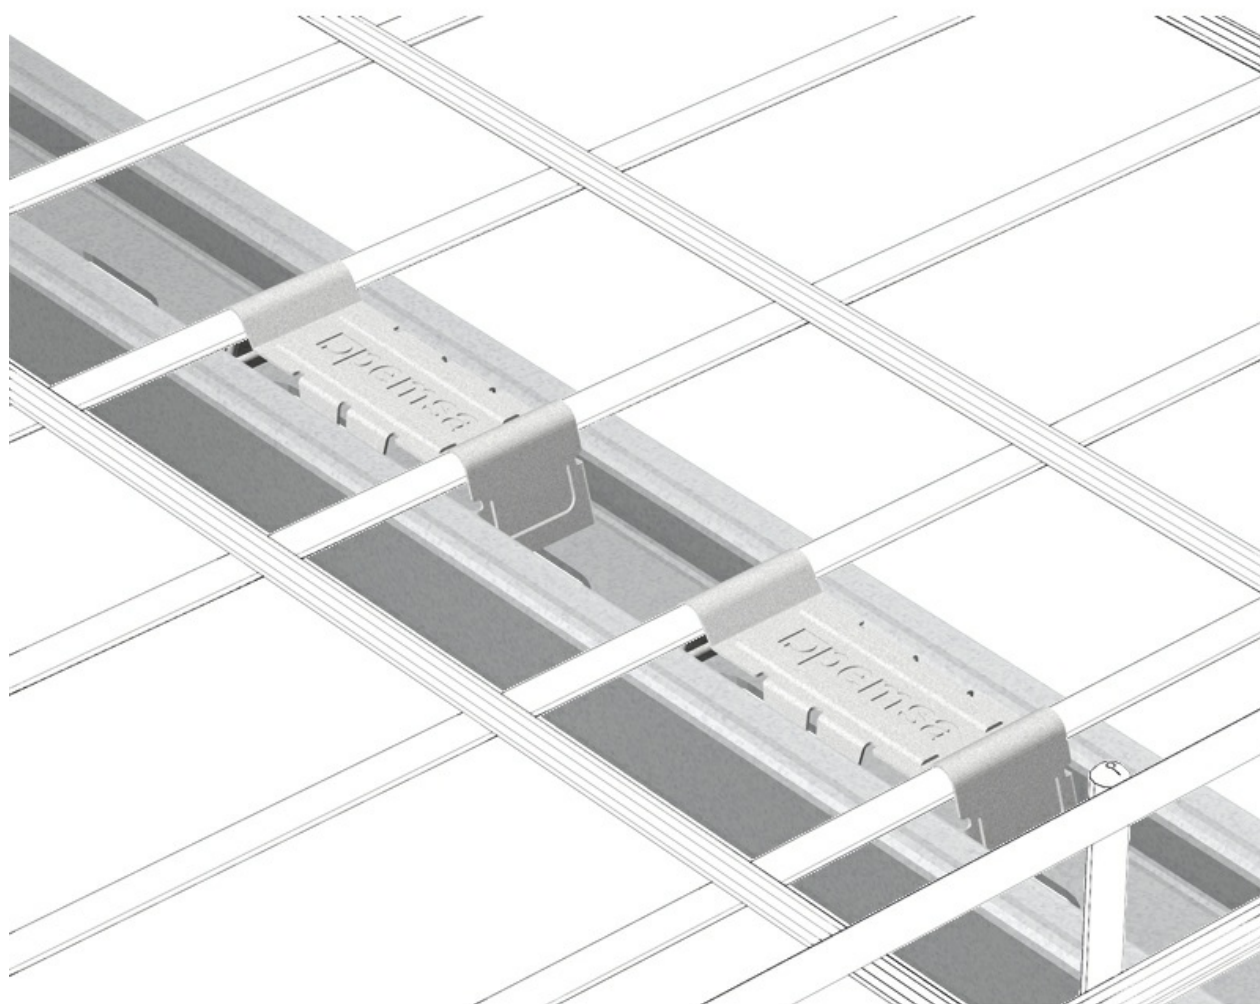

**Light Duty Channel 41x21** ( Ref: 67030075 )

