
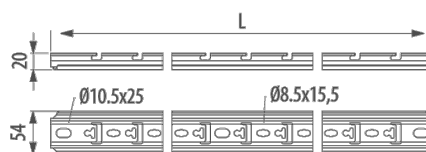


## SPLUS Omega Channel ( Ref: 67020110 )

1/4

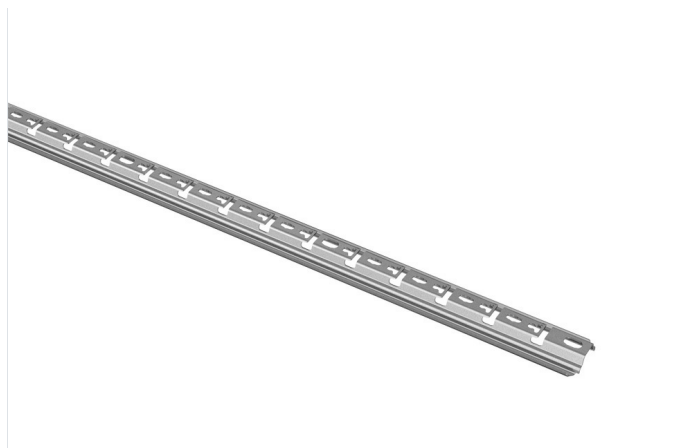

### Description

Channel with omega profile and universal connection system for Rejiband® and Pemsaband® trays. Length of 1 metres, With PG protection system. It allows you to configure different structures individually or with the help of omega SPLUS brackets to support wall or ceiling mounted tray with a threaded rod. Available in lengths of 1000, 2000 and 3000 mm. Made of steel in various Protection Systems.

### Advantages

Performance is increased by 20% when used as a suspension or as a wall mounted rail with other brackets attached.

CE conformity to directive 2014/35 / EU.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Due to its dimensions and very versatile structure, it can be used in ceiling mounts as a suspension for several trays on the same line.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

### Applications

Suitable for the creation of support structures for installations of Rejiband® and Pemsaband® trays in the management of electrical wiring and / or telecommunications in the tertiary sector.

### Solutions



OFFSHORE, PORTS RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC000386                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 3,456                      |  |
| Protection System                     |  | PG                         |  |
| Finish                                |  | PG3, Pregalvanised         |  |
| Resistance Class                      |  | Class 3                    |  |
| Length (m)                            |  | 1                          |  |
| kg/u                                  |  | 1,070                      |  |
| u                                     |  | 1                          |  |
| Material                              |  | Steel with surface coating |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications

