
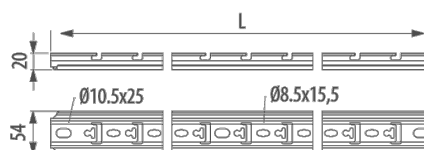


SPLUS Omega Channel (Ref: 67020111)

1/4

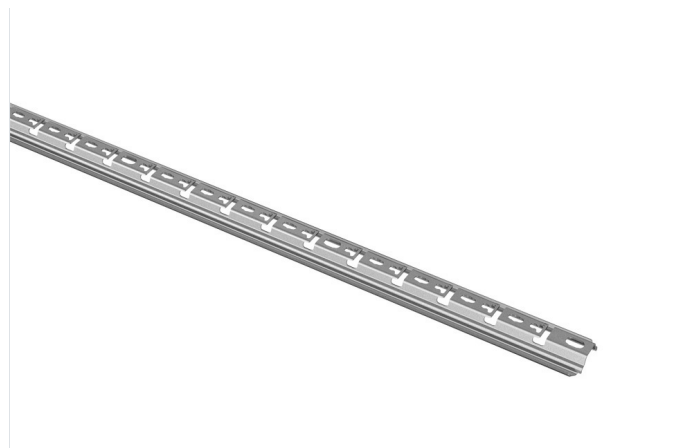

Description

Channel with omega profile and universal connection system for Rejiband® and Pemsaband® trays. Length of 2 metres, With PG protection system. It allows you to configure different structures individually or with the help of omega SPLUS brackets to support wall or ceiling mounted tray with a threaded rod. Available in lengths of 1000, 2000 and 3000 mm. Made of steel in various Protection Systems.

Advantages

Performance is increased by 20% when used as a suspension or as a wall mounted rail with other brackets attached.

CE conformity to directive 2014/35 / EU.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Due to its dimensions and very versatile structure, it can be used in ceiling mounts as a suspension for several trays on the same line.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Applications

Suitable for the creation of support structures for installations of Rejiband® and Pemsaband® trays in the management of electrical wiring and / or telecommunications in the tertiary sector.

Solutions



OFFSHORE, PORTS RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000386	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		6,718	
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
Length (m)		2	
kg/u		2,080	
u		1	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

