
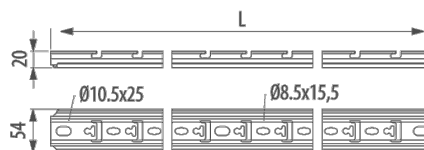


SPLUS Omega Channel (Ref: 67030111)

1/4

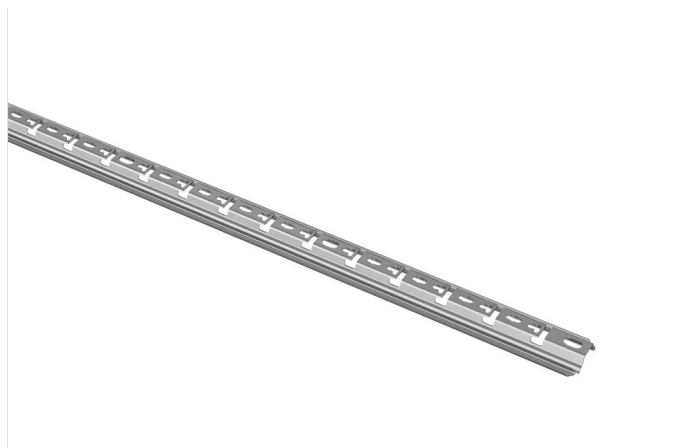

Description

Channel with omega profile and universal connection system 2 metre in length for Rejiband® and Pemsaband® trays. It allows you to configure different structures individually or with the help of omega SPLUS brackets to support wall or ceiling mounted tray with a threaded rod. Made of steel.

Advantages

Applications

Solutions



OFFSHORE, PORTS RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL TUNNELS INFRASTRUCTURES FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000386	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		6,718	
Protection System		AZ+	
Finish		ZM High Resistance Alloy	
Resistance Class		Class 8	
Length (m)		2	
kg/u		2,080	
u		1	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

