
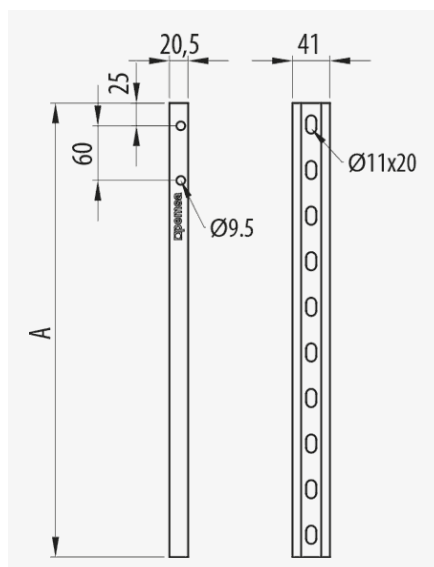


Heavy Duty Pendant Channel

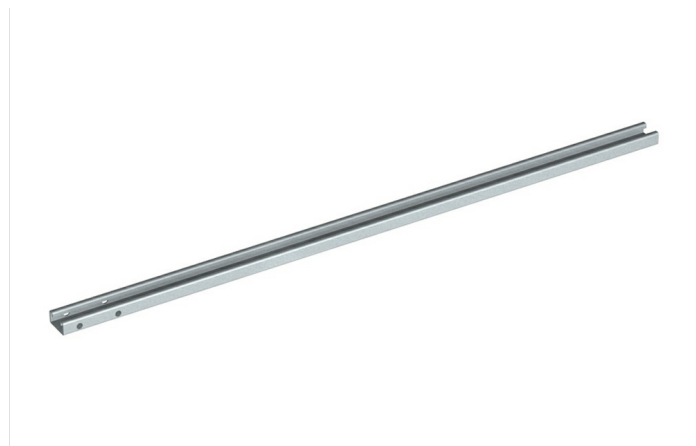

Description

Metal pendant channel with holes on the end for the support of Rejiband® wire mesh trays and Pemsaband® sheet trays. It allows for the inclination to be changed on a sloping roof by means of the pendant channel suspension accessory. Made of steel, available in lengths of 500 mm and 1000 mm and with PG Protection System.

Advantages

It has holes at the end of the channel for connection to the pendant boss. It allows for the installation of trays on sloping ceilings.

Allows horizontal installation of omega SPLUS and reinforced RPLUS supports.

Available in two lengths: 500 mm and 1000 mm.

CE conformity to directive 2014/35 / EU.

PG protection system, according to BS-EN-10142, suitable for indoor installations in industrial environments. Corrosion resistance class 3.

Applications

Suitable for supporting medium and high loads of cable trays to the ceiling by means of a variable angled rod for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications.

Solutions



INDUSTRIA PETROQUÍMICA TUNELES. INFRAESTRUCTURAS













www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 PG	 Class 3	 21	 1	 Steel with surface coating	 350	 36	 43	 -50 / 150 °C
 A1 No combustible	ETIM EC000082							

Product data

	Ref	kg/u
0.5	67030646	0.901
1	67030647	1.810

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic