


Spring Channel Screw

1/4

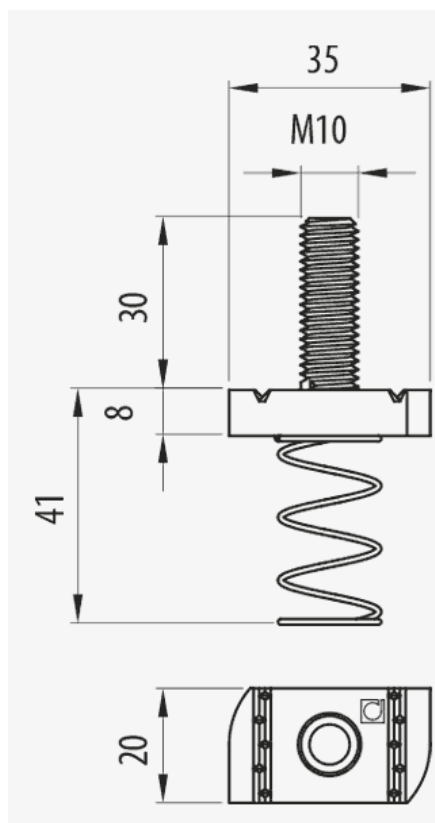

Description

Screw and nut with spring for connecting to 41x41 channels with other accessories for the creation of structures with Rejiband® wire mesh trays, Pemsaband® sheet trays and Megaband® ladder. Made of steel and with EZ Protection System.

Advantages

Suitable for placing inside the channel, both for the fixing of channel accessories or brackets to it. Use with hexagonal nut M10.

The spring facilitates the assembly. The nut remains steady and the serrated edges contribute to a greater grip.

Available for 41x21 and 41x41 channels.

CE conformity to directive 2014/35 / EU.

PG protection system (standard EN-ISO 2081), silver colour, suitable for indoor installations. Corrosion resistance class 3.

Applications

Suitable for the fixing of channel supports and structures for installations of Pemsaband® and Rejiband® metal trays in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial installations and tertiary sector.

Solutions



INDUSTRIA PETROQUÍMICA TUNELES. INFRAESTRUCTURAS



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."












Spring Channel Screw

Main technical characteristics

ETIM
EC000482

Product data

					Ref	kg/u				
EZ	Class 3	41	M10	30	67020159	0.062	50	Steel with surface coating	-50 / 150 °C	A1 No combustible

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester


TPV - Thermoplastic



Spring Channel Screw

3/4

Product applications

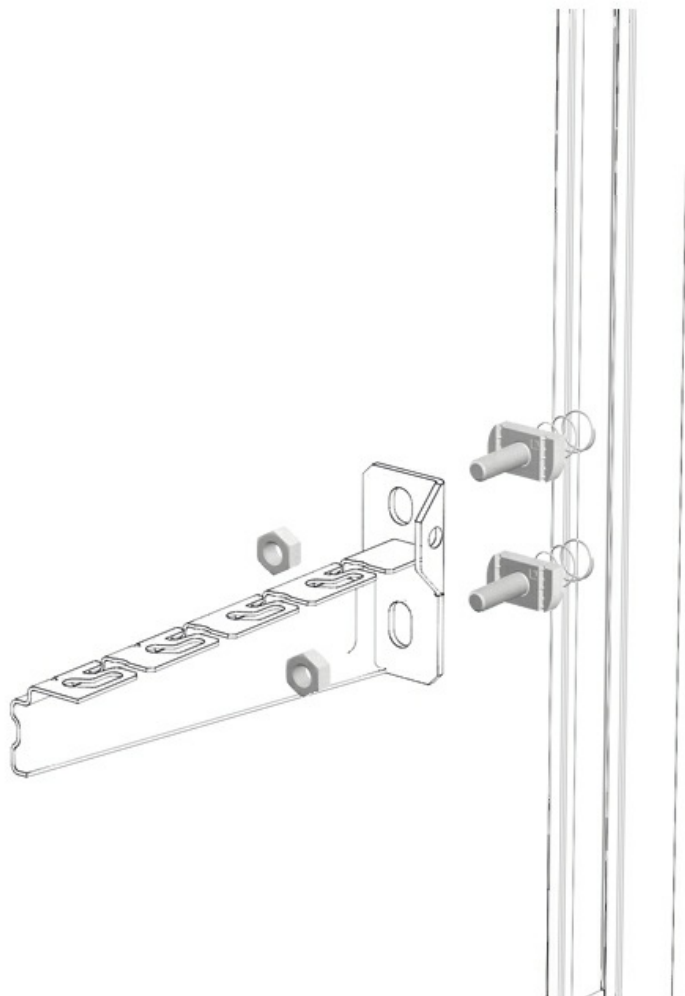

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Spring Channel Screw

