


## U Shape Splice Plate n°2 ( Ref: 67030214 )

1/3

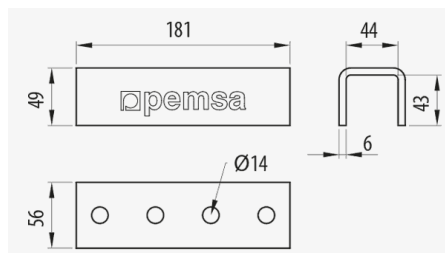

### Description

Straight U shape splice plate N° 2 for the connection of channels. Suitable for 41x21 mm and 41x41 mm channels. Its U-shape provides greater rigidity in the joining of channels. Made of steel with GC Protection System.

### Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

CE conformity to directive 2014/35 / EU.

Connect with 4 hexagonal bolts and M10 channel nuts.

Available for 41x21 and 41x41 channels.

It allows the joining of different sections of channel. Its U-shape provides greater rigidity in the joint.

### Applications

Suitable for connection with 41x21 mm and 41x41 mm channels for the creation of support structures for tray installations in the conduction of electric cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

### Solutions



INDUSTRIA PETROQUÍMICA TUNELES. INFRAESTRUCTURAS



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data      |                         |                                |                            |
|-------------------|-------------------------|--------------------------------|----------------------------|
| Protection System | GC                      | u                              | 1                          |
| Finish            | HDG, Hot Dip Galvanised | Material                       | Steel with surface coating |
| Resistance Class  | Class 6                 | Working temperature range (°C) | -50 / 150 °C               |
| kg/u              | 1.140                   | Fire resistance                | A1 No combustible          |

Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic

**U Shape Splice Plate n°2** ( Ref: 67030214 )

**Product applications**

