


## 90° 4 Hole Angle Bracket n°4

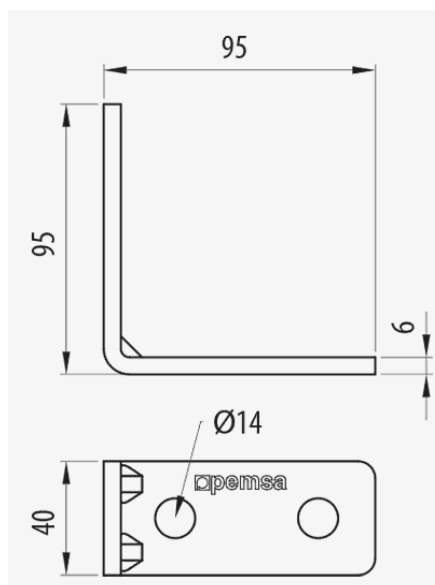

### Description

Metal Angle bracket N° 4, for the assembly of two channels that cross perpendicularly for support structures in the installation of trays, with an L-shaped forming ar Suitable for 41x21 mm and 41x41 mm channel. Made of steel and GC Protection System.

### Advantages

Allows the perpendicular connection of two sections of channel.

Connect with 4 hexagonal bolts and M10 channel nuts.

Available for 41x21 and 41x41 channels.

CE conformity to directive 2014/35 / EU.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Made in stainless steel AISI316L. Corrosion resistance class 9D

### Applications

Suitable for connection with 41x21 mm and 41x41 mm channels for the creation of support structures for tray installations in the conduction of electric cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

### Solutions



OFFSHORE, PORTS TUNNELS INFRASTRUCTURES



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## 90° 4 Hole Angle Bracket n°4

2/3

### Main technical characteristics

|                                                                                          |    |                                                                                     |                                                                                                              |                                                                                                |                                                                                                     |                     |
|------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------|
|  Class 6 | 90 |  1 |  Steel with surface coating |  -50 / 150 °C |  A1 No combustible | ETIM 10<br>EC000483 |
|------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------|

### Product data

| Ⓢ    | R#       | kg/l  |
|------|----------|-------|
| GC   | 67030202 | 0,310 |
| INOX | 81000490 | 0,311 |

### Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

### Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## 90° 4 Hole Angle Bracket n°4

### Product applications

