


45° External Angle Bracket n° 5 (Ref: 67030210)

1/3

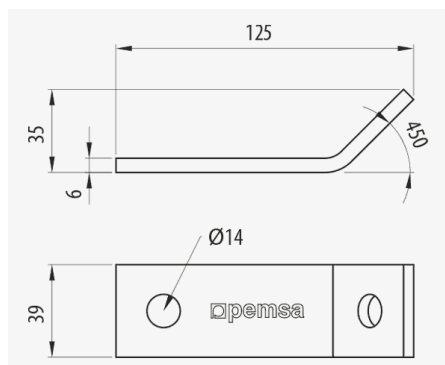

Description

Metal Angle bracket N° 5, L-shaped forming an angle of 90° for the assembly of two channels that cross perpendicularly for support structures in the installation of trays. Angle of 45°. Suitable for 41x21 mm and 41x41 mm channel. Made of steel and GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

CE conformity to directive 2014/35 / EU.

Connect with 2 hexagonal bolts and M10 channel nuts.

Available for 41x21 and 41x41 channels.

It allows the connection at a 45° outside angle of two sections of channel.

Applications

Suitable for connection with 41x21 mm and 41x41 mm channels for the creation of support structures for tray installations in the conduction of electric cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

Solutions



OFFSHORE, PORTS TUNNELS INFRASTRUCTURES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



2/3

ETIM 10	EC000483
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Protection System	GC
Finish	HDG, Hot Dip Galvanised
Resistance Class	Class 6
Angle	45
kg/u	0,237

Material	Steel with surface coating
-----------------	----------------------------

Working temperature range (°C)	-50 / 150 °C
--------------------------------	--------------

Fire resistance	A1 No combustible
------------------------	-------------------

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

45° External Angle Bracket n° 5 (Ref:
67030210)

Product applications

