


L Bracket n° 7 (Ref: 67030211)

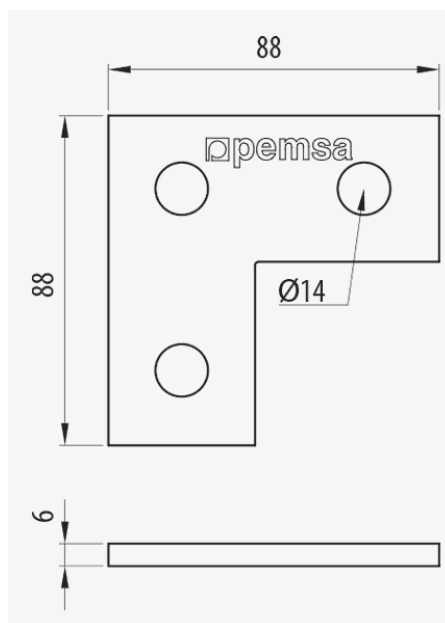

Description

Metal Angle bracket N° 7, L-shaped forming an angle of 90° for the assembly of two channels that cross perpendicularly for support structures in the installation of trays. Angle of 90°. Suitable for 41x21 mm and 41x41 mm channel. Made of steel and GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

CE conformity to directive 2014/35 / EU.

Connect with 3 hexagonal bolts and M10 channel nuts.

Available for 41x21 and 41x41 channels.

It allows the connection at a 90° inside angle of two sections of channel.

Applications

Suitable for connection with 41x21 mm and 41x41 mm channels for the creation of support structures for tray installations in the conduction of electric cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

Solutions



OFFSHORE, PORTS TUNNELS INFRASTRUCTURES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC000483	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	
Protection System		Steel with surface coating	
Finish		Working temperature range (°C)	
Resistance Class		-50 / 150 °C	
Angle		Fire resistance	
kg/u		A1 No combustible	
GC		HDG, Hot Dip Galvanised	
Class 6		90	
0,234			

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

