
pemsa

Accessories

Reinforced Angle Bracket n°11

26/04/2024 1/3



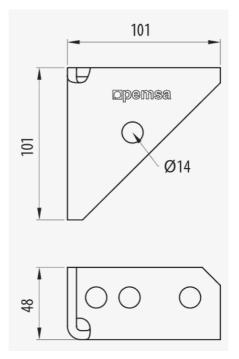



Description

Metal reinforced angle bracket N° 11 in the form of a reinforced square for the assembly of two channels that cross perpendicularly for support structures in the installation of trays. Suitable for 41x21 mm, 41x41 mm and 41x82 mm channel. Made of steel and GC Protection System.

Advantages

Allows the perpendicular connection of two sections of channel.

Connect with 4 hexagonal bolts and M10 channel nuts.

Available for 41x21, 41x41 and 41x82 channels.

CE conformity to directive 2014/35 / EU.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Applications

Suitable for connection with 41x21 mm, 41x41 mm and 41x82 mm channels for the creation of support structures for tray installations in the conduction of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and tertiary sector.

Solutions





INDUSTRIA PETROQUÍMICA TUNELES. INFRAESTRUCTURAS



🔣 KVE-1 🏠 🖸 👄 🖪 🤇 🥌 E90

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

pemsa

S Protection System

Accessories

Reinforced Angle Bracket n°11

26/04/2024

6/04/2024 <mark>2/3</mark>

Main technical characteristics

ETIM EC0004

Product data Ref kg/u Coll Oo Coll	EC00048	32							
	Product data								
GC Class 6 90 67030213 0.596 1 Steel with surface coating -50 / 150 °C A1 No combustible	S	Cass IEC 61537		Ref	kg/u	¢.	0	t∰±	藗
	GC	Class 6	90	67030213	0.596	1	Steel with surface coating	-50 / 150 °C	A1 No combustible

• • • • • • • • • • • • • • • • • • • •
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass
Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermonlastic

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




Accessories

Reinforced Angle Bracket n°11

Product applications



26/04/2024 <mark>3/3</mark>

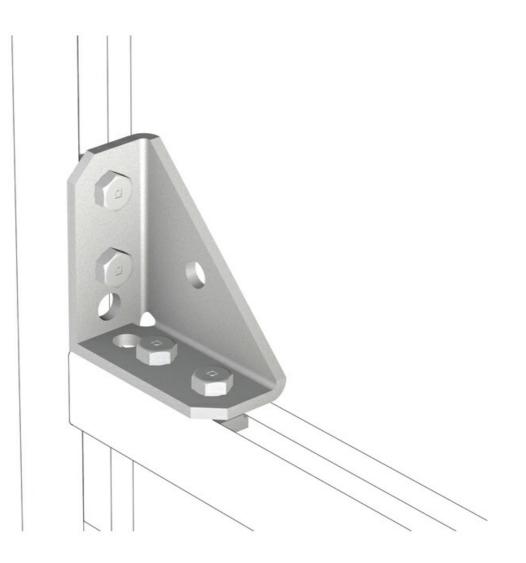



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

ES REVE-1 😫 🖻 👄 🖪 (E 📟 E90