

Megaband Rep Accessories

30/10/2026



# Megaband REP Central Reducer ( Ref: 82002427 )

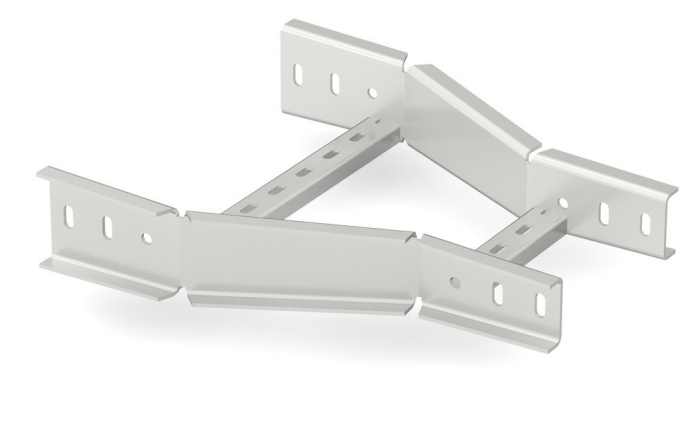

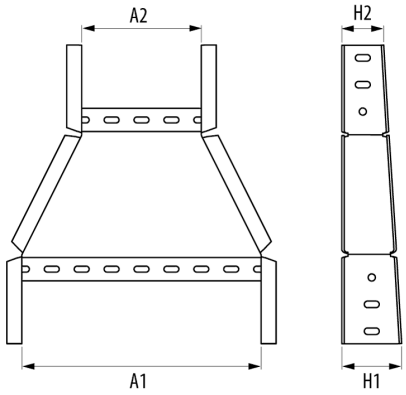


## Description

Metal accessory for creating an equal reduction between two sections of Megaband® REP ladder. Of 120 mm height, Width 600 mm, With a reduction of 400 mm. It allows changes in width and height of different sections to be made very easily using a single piece. Made from steel with GC Protection system

## Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in 70, 100 and 120 height and 100 to 600 mm wide

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

It allows the creation of width changes to adapt to the demands of each electrical installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

## Applications

Suitable for creating width and height reductions in Megaband® REP ladder, in electrical and telecommunications installations and to support large loads in industrial, petrochemical, oil & gas, power plant, mining and cement facilities.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Megaband REP Central Reducer ( Ref: 82002427 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001011 | **kg/u** | 6,480 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 16,783 | **u** | 1 |
| **Protection System** | GC | **Material** | Steel with surface coating |
| **Finish** | HDG, Hot Dip Galvanised | **Impact Strength (J)** | 20 J |
| **Resistance Class** | Class 8 | **Working temperature range (°C)** | -50 / 150 °C |
| **Flange (mm)** | 120 | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 600 | | |
| **Reduce to:** | 400 | | |
| **R (mm)** | 300 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."