
PQ Equal Reducer



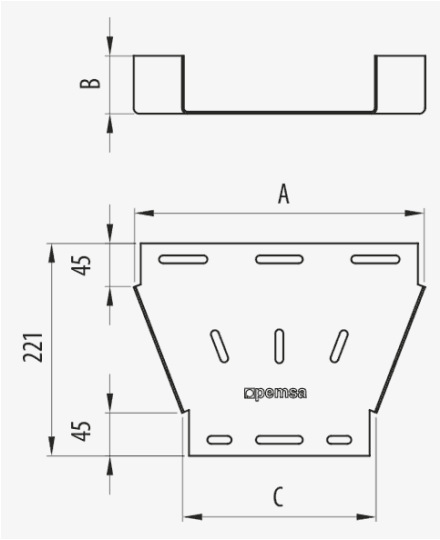

Description

Metal accessory for the creation of an equal reducer for the installation of wiring with the Pemsaband® PQU and PQW trays with heights of 15, 30, 50 and 60 mm. With GC Protection System. It allows making changes of width of different sections with great ease using a single piece.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50 and 60. Please consult for the available widths and reduction sizes.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of width reductions in Pemsaband® PQU and PQW trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Equal Reducer

Main technical characteristics

GC | Class 8 | 15, 30, 50, 60 | 300, 400, 500, 600, 100, 200 | 100 | 1 | Steel with surface coating | 20 J | -50 / 150 °C | A1 No combustible | ETIM 10 EC001007

Product data

			REF	kg/u
15	300	200	70263030	0,928
30	300	200	70263130	1,000
30	400	300	70263140	1,360
30	500	400	70263150	1,720
30	600	500	70263160	2,080
50	300	200	70263230	1,100
50	400	300	70263240	1,450
50	500	400	70263250	1,810
50	600	500	70263260	2,270
60	300	200	70263330	1,140
60	400	300	70263340	1,500
60	500	400	70263350	1,860
60	600	500	70263360	2,230
30	100	50	82003882	0,373
50	200	50	82003883	0,660
50	200	100	82003884	0,733
50	400		82003885	1,131
50	400	100	82003886	1,191
50	400	200	82003887	1,311

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Equal Reducer

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."