


**PQ Equal Reducer** ( Ref: 70263160 )

1/2

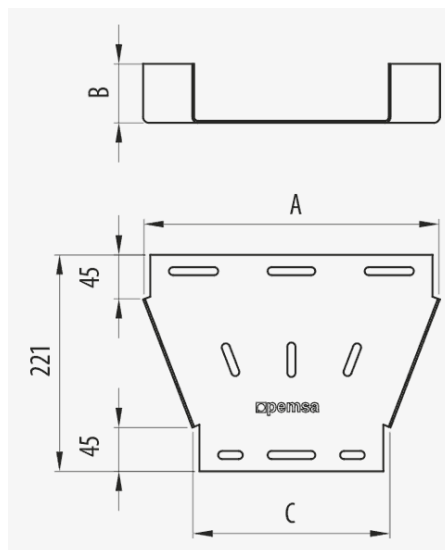

**Description**

Metal accessory for the creation of an equal reducer for the installation of wiring with the Pemsaband® PQU and PQW trays with heights of 15, 30, 50 and 60 mm. Of 30 mm height, Width 600 mm, With a reduction of 500 mm. With GC Protection System. It allows making changes of width of different sections with great ease using a single piece.

**Advantages**

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50 and 60. Please consult for the available widths and reduction sizes.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

**Applications**

Suitable for the creation of width reductions in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001007                | kg/u                           | 2,080                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 5,387                   | u                              | 1                          |
| Protection System                     | GC                      | Material                       | Steel with surface coating |
| Finish                                | HDG, Hot Dip Galvanised | Impact Strength (J)            | 20 J                       |
| Resistance Class                      | Class 8                 | Working temperature range (°C) | -50 / 150 °C               |
| Flange (mm)                           | 30                      | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 600                     |                                |                            |
| Reduce to:                            | 500                     |                                |                            |
| R (mm)                                | 100                     |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

