


PQ Equal Reducer (Ref: 70263260)

1/2

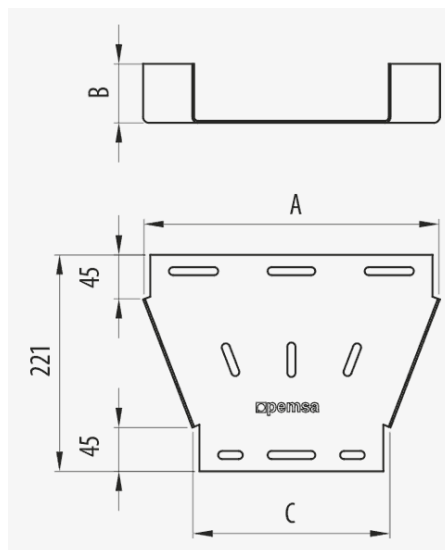

Description

Metal accessory for the creation of an equal reducer for the installation of wiring with the Pemsaband® PQU and PQW trays with heights of 15, 30, 50 and 60 mm. Of 50 mm height, Width 600 mm, With a reduction of 500 mm. With GC Protection System. It allows making changes of width of different sections with great ease using a single piece.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50 and 60. Please consult for the available widths and reduction sizes.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

Applications

Suitable for the creation of width reductions in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001007	kg/u	2,270
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	5,879	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	50	Fire resistance	A1 No combustible
Width (mm)	600		
Reduce to:	500		
R (mm)	100		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic