


PQU AL Equal Reducer (Ref: 82002288)

1/2

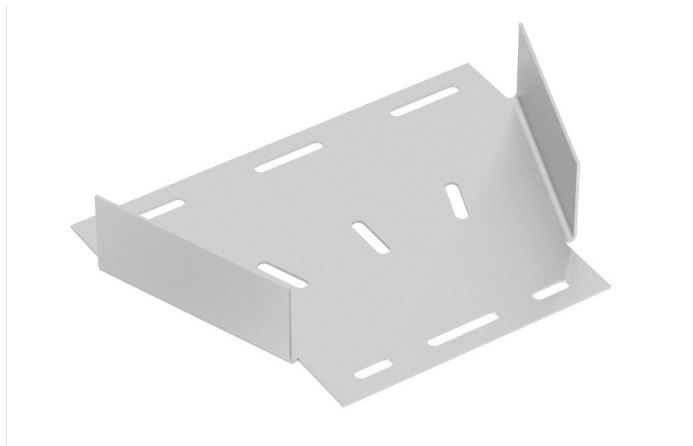

Description

Metal accessory for creating an equal reduction for Pemsaband® PQU AL trays. Of 60 mm height, Width 600 mm, With a reduction of 400 mm, With AL protection system. Suitable for wiring installation with trays. Made from Aluminium alloy 1050H24.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available for all heights 30, 50, 60 and request for available widths and reduction sizes.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

It allows making width changes of different straight sections with great ease using a single piece.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQU AL Equal Reducer (Ref: 82002288)

2/2

Product data

ETIM 10	EC001007	kg/u	0,837
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	1
Protection System	AL	Material	Aluminum
Finish	1050H24 Aluminium	Impact Strength (J)	20 J
Flange (mm)	60	Working temperature range (°C)	-50 / 150 °C
Width (mm)	600	Fire resistance	A1 No combustible
Reduce to:	400		
R (mm)	200		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

