
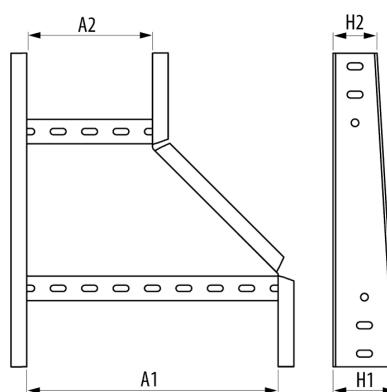


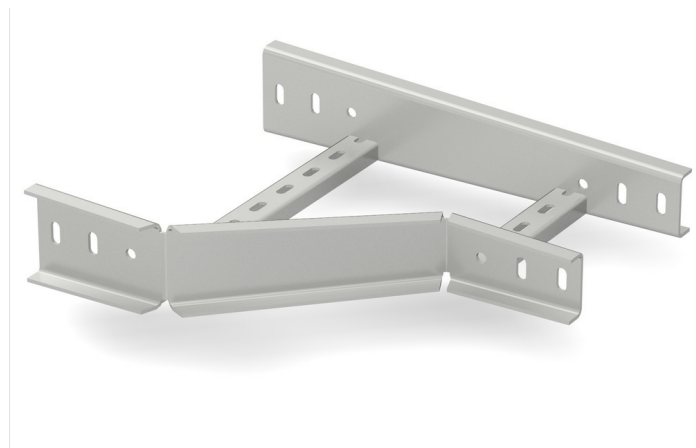

Description

Metal accessory for creating a left offset reduction in the wiring installation with the Megaband® REP ladder. Of 70 mm height, Width 200 mm, With a reduction of 100 mm. It allows changes in width and height of different sections to be made very easily using a single piece. Made from steel with GC Protection system

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in 70, 100 and 120 height and 100 to 600 mm wide

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

It allows the creation of width changes to adapt to the demands of each electrical installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating width and height reductions in Megaband® REP ladder, in the routing, transport and distribution of cables in installations in the Petrochemical, Oil & Gas, Offshore, Civil Works and Infrastructure industries, as well as in tunnels and installation galleries.

Solutions



Product data			
ETIM 10		EC001011	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		10,256	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 8	
Flange (mm)		70	
Width (mm)		200	
Reduce to:		100	
R (mm)		300	
kg/u		3,960	
u		1	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic