
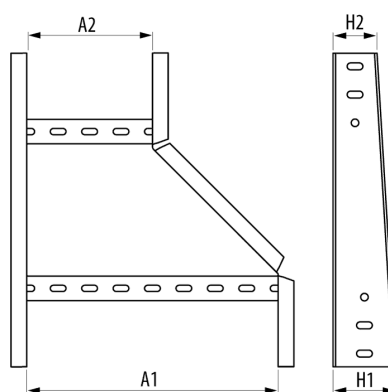


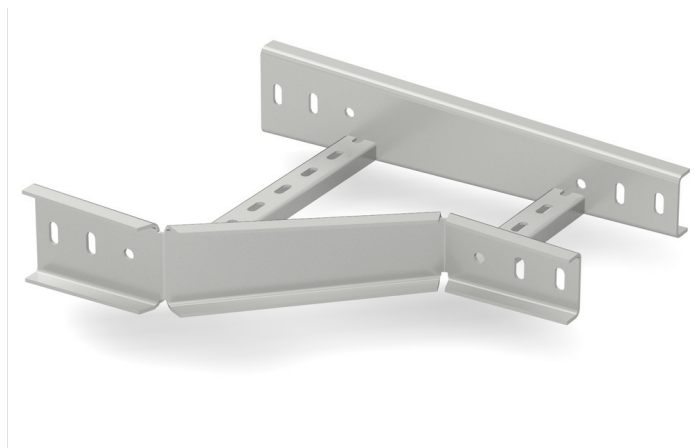

Description

Metal accessory for creating a left offset reduction in the wiring installation with the Megaband® REP ladder. Of 100 mm height, Width 400 mm, With a reduction of 200 mm. It allows changes in width and height of different sections to be made very easily using a single piece. Made from steel with GC Protection system

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in 70, 100 and 120 height and 100 to 600 mm wide

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

It allows the creation of width changes to adapt to the demands of each electrical installation.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating width and height reductions in Megaband® REP ladder, in the routing, transport and distribution of cables in installations in the Petrochemical, Oil & Gas, Offshore, Civil Works and Infrastructure industries, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001011	kg/u	5,160
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	13,364	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	100	Fire resistance	A1 No combustible
Width (mm)	400		
Reduce to:	200		
R (mm)	300		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic