


Left Reducer Pemsaband Vulcan (Ref: 82005188)

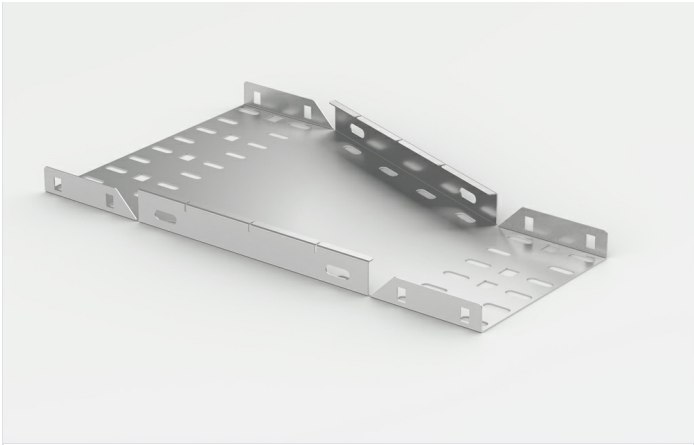

Description

Advantages

Applications

Solutions



Product data	
ETIM 10	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Protection System	AZ+
Finish	ZM High Resistance Alloy
Resistance Class	Class 8
Flange (mm)	25
Width (mm)	600
Reduce to:	450

Material	Steel with surface coating
Impact Strength (J)	20 J
IP	IP44
Working temperature range (°C)	-50 / 150 °C
Fire resistance	A1 No combustible



Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass



Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic