


## RGp Swivel Connector 7035 ( Ref: 35012400 )

1/2

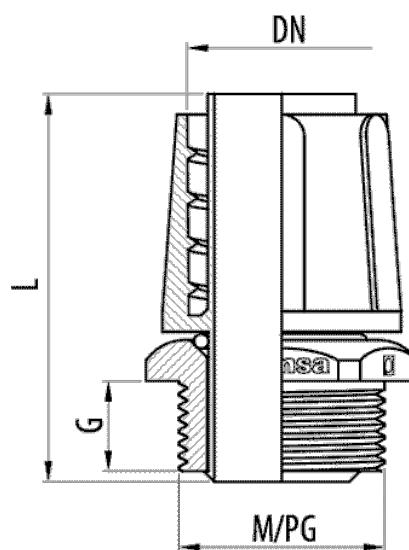

### Description

Straight swivel connector made of polyamide 6 in grey colour with metric thread for the installation of TFA, Ecoflex® and TM-PVC conduits. Plug-in connection system and threaded on the other end. Body and nut in grey colour (RAL 7035).

### Advantages

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials. Also available in dark grey RAL 7001.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Easy installation of fitting to a box thanks to its rotating body.

Protection index EN 60529: IP65.

### Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building and industrial applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## Product data

<b>Colour</b>	Grey RAL 7035	<b>kg/u</b>	0.042
<b>DN</b>	NW29	<b>u</b>	10
<b>M/PG</b>	M40	<b>Material</b>	Poyamide 6
<b>G (mm)</b>	12.5	<b>IP</b>	IP65
<b>L (mm)</b>	66	<b>Working temperature range (°C)</b>	-25 / 105 °C
<b>Torque wrench</b>	44	<b>Fire resistance</b>	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

## Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

## Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

