


RGp Swivel Connector 7035 (Ref: 35012500)

1/2

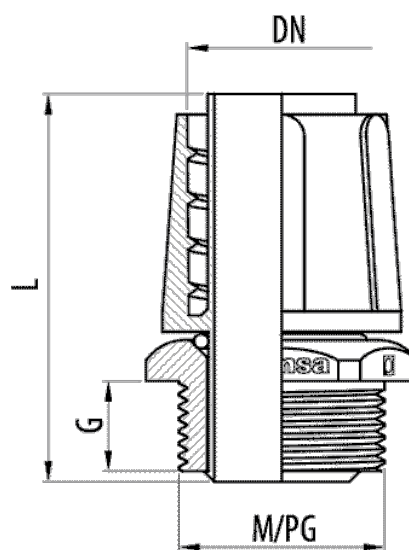

Description

Straight swivel connector made of polyamide 6 in grey colour with metric thread for the installation of TFA, Ecoflex® and TM-PVC conduits. Plug-in connection system and threaded on the other end. Body and nut in grey colour (RAL 7035).

Advantages

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials. Also available in dark grey RAL 7001.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Easy installation of fitting to a box thanks to its rotating body.

Protection index EN 60529: IP65.

Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



RGp Swivel Connector 7035 (Ref: 35012500)

2/2

Product data

ETIM 10	EC001178	kg/u	0,045
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	8
Colour	Grey RAL 7035	Material	Polyamide 6
DN	NW36	IP	IP65
M/PG	M50	Working temperature range (°C)	-25 / 105 °C
G (mm)	12.5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	67		
Torque wrench	54		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

