

### Description

150mm depth steel wire mesh tray, with surface protection, or AISI 304 or 316L stainless steel with safety edge for support and cable management. Of 150 mm height, Width 400 mm, Length of 3 metres, With EZ protection system, EZ3 finish. The Rejiband® cable tray is composed of electrowelded mesh rods that provide great resistance and elasticity. The ease of assembly, thanks to its flexibility saves material and labour costs. Manufactured according to international standard IEC 61537. Its wide variety of sizes and protection systems facilitates the most appropriate choice according to the needs of each installation.

### Advantages

Altura del ala de 150 mm y ancho disponible en 100, 150, 200, 300, 400, 500 y 600 mm con una amplia gama de accesorios.

Rounded safety edge that prevents damage to the cables and harm to the installer.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

N Mark of Aenor, UL Certificate, Certificate IECC CB according to IEC 61537.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

### Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various finishes.

### Solutions



CENTROS DE DATOS EDIFICACIÓN. TERCIARIO RESISTENCIA AL FUEGO



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





Product data			
Protection System	EZ	u	6
Finish	EZ3, Electrogalvanised	Material	Steel with surface coating
Resistance Class	Class 3	Impact Strength (J)	20 J
Flange (mm)	150	Section (mm2)	53994
Width (mm)	400	Working temperature range (°C)	-50 / 150 °C
Length (m)	3	Fire resistance	E90 (90 min. 1000°C)
kg/u	2.858		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

## Load diagrams

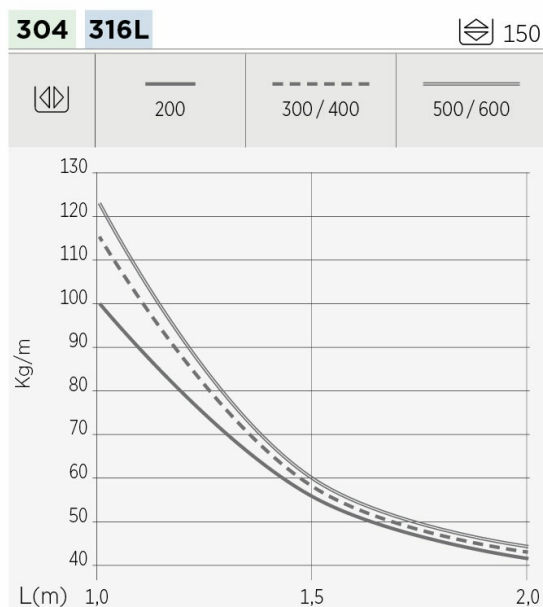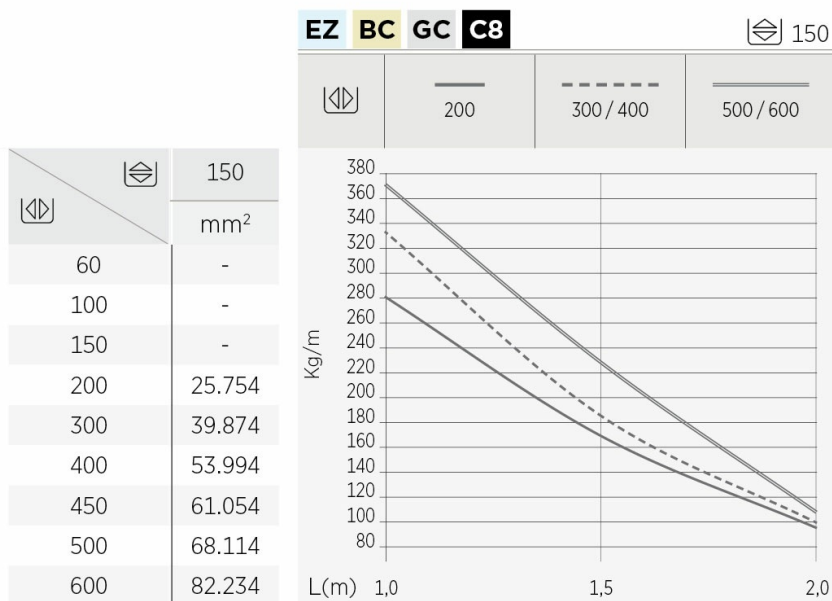

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

