


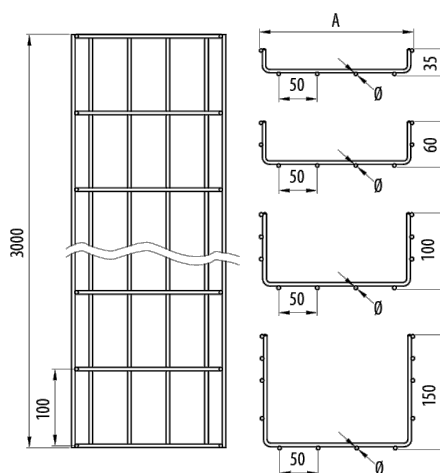

Description

150mm depth steel wire mesh tray, with surface protection, or AISI 304 or 316L stainless steel with safety edge for support and cable management. Of 150 mm height, Width 400 mm, Length of 3 metres, With BK8 protection system, BLACK C8 finish. The Rejiband® cable tray is composed of electrowelded mesh rods that provide great resistance and elasticity. The ease of assembly, thanks to its flexibility saves material and labour costs. Manufactured according to international standard IEC 61537. Its wide variety of sizes and protection systems facilitates the most appropriate choice according to the needs of each installation.

Advantages

Height 150mm and available widths of 100, 150, 200, 300, 400, 500 and 600mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

N Mark of Aenor, UL Certificate, Certificate IECC CB according to IEC 61537.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various protection systems.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000853	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		3,23	
Protection System		BK8	
Finish		BLACK C8	
Resistance Class		Class 8	
Flange (mm)		150	
Width (mm)		400	
Length (m)		3	
kg/u		3,198	
u		6	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Section (mm2)		53994	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

🔒 Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic

Load diagrams

		EZ	BC	GC	C8
		 150			
			 200	 300 / 400	 500 / 600
	 150 mm ²				
60	-				
100	-				
150	-				
200	25.754				
300	39.874				
400	53.994				
450	61.054				
500	68.114				
600	82.234				

