


## Rejiband 60x60 Double Rod

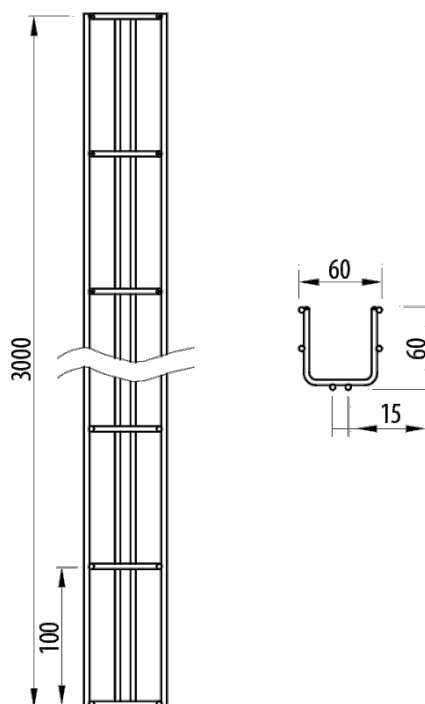

### Description

Steel wire mesh tray 60x60 mm with double rod in the base, with surface protection or AISI 304 or 316L stainless steel and safety edge for support and cable management. The Rejiband® cable tray is composed of electro-welded mesh rods that provide great strength and elasticity. The easiness in the assembly, thanks to its flexibility allows to save material and labour costs. Manufactured according to international standards IEC 61537.

### Advantages

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rounded safety edge that prevents damage to the cables and harm to the installer.

It has a double rod in the base that improves its fixing.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Wide range of protection systems: EZ, BC, GC, BK8 and stainless steel AISI 304 and AISI 316L.

### Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various finishes.

### Solutions



INDUSTRIA ALIMENTARIA INDUSTRIA QUIMICA FARMACEUTICA INDUSTRIA PETROQUÍMICA ENERGÍA FOTOVOLTAICA CENTROS DE DATOS EDIFICACIÓN. TERCIARIO











TÚNELES. INFRAESTRUCTURAS



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics									
 60	 60	 3	 18	 20 J	 mm² 2378	 -50 / 150 °C	 A1 No combustible	ETIM	

Product data				
Ⓢ	Class 61537	Ref	kg/u	Ⓜ
EZ	Class 3	60212065	0.748	Steel with surface coating
GC	Class 7	60232065	0.793	Steel with surface coating
INOX	Class 9C	60252065	0.748	Stainless steel AISI 304
INOX	Class 9D	60262065	0.748	Acero inoxidable AISI 316L
BK8	Class 8	60282065	0.748	Steel with surface coating

Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Ⓜ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

## Product applications

