


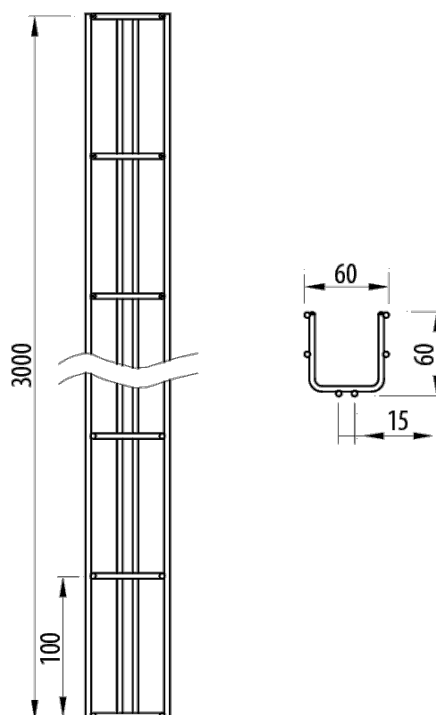

Description

Steel wire mesh tray 60x60 mm with double rod in the base, with surface protection or AISI 304 or 316L stainless steel and safety edge for support and cable management. Of 60 mm height, Width 60 mm, With BK8 protection system, BLACK C8 finish. The Rejiband® cable tray is composed of electro-welded mesh rods that provide great strength and elasticity. The easiness in the assembly, thanks to its flexibility allows to saves material and labour costs. Manufactured according to international standards IEC 61537.

Advantages

Wide range of protection systems: EZ, BC, GC, BK8 and stainless steel AISI 304 and AISI 316L.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

It has a double rod in the base that improves its fixing.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various protection systems.

Solutions



PHARMACEUTICAL INDUSTRY OFFSHORE, PORTS ENERGY RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL TUNNELS INFRASTRUCTURES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC000853	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,756	
Protection System		BK8	
Finish		BLACK C8	
Resistance Class		Class 8	
Flange (mm)		60	
Width (mm)		60	
Length (m)		3	
kg/u		0,748	
u		18	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Section (mm2)		2378	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS

PVC

PP

PA6

PA12

PU

PE

NBR

PET

TPV

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane


PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

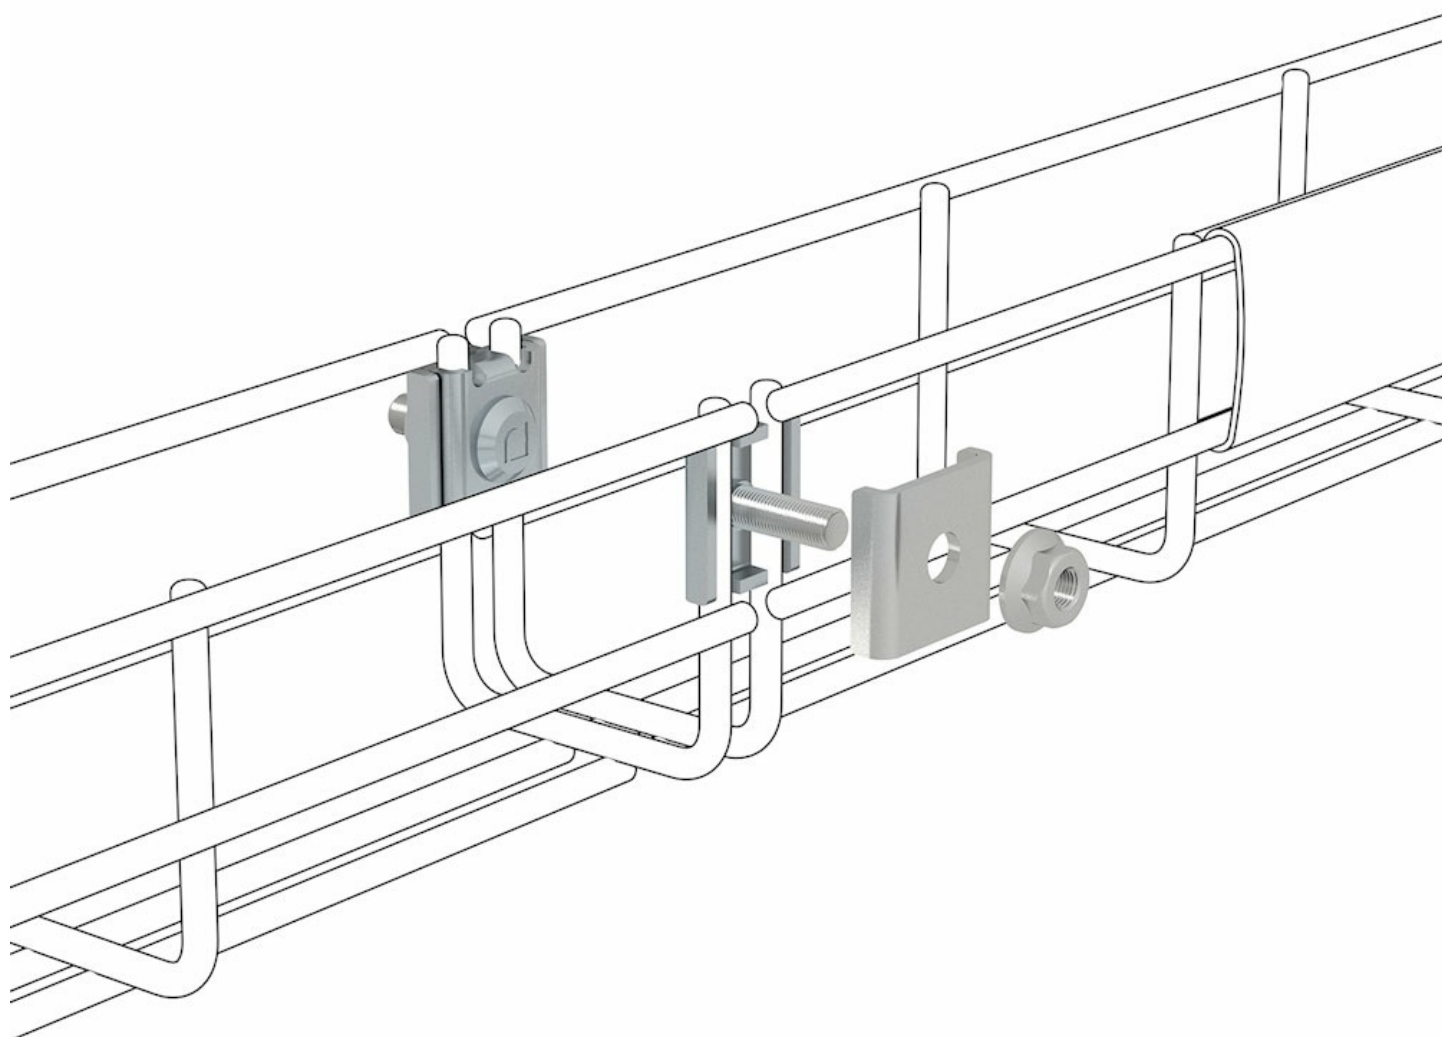

□



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."