
Supports Technical Floors

30/10/2026

# Stand off Bracket Click 100 ( Ref: 67060560 )



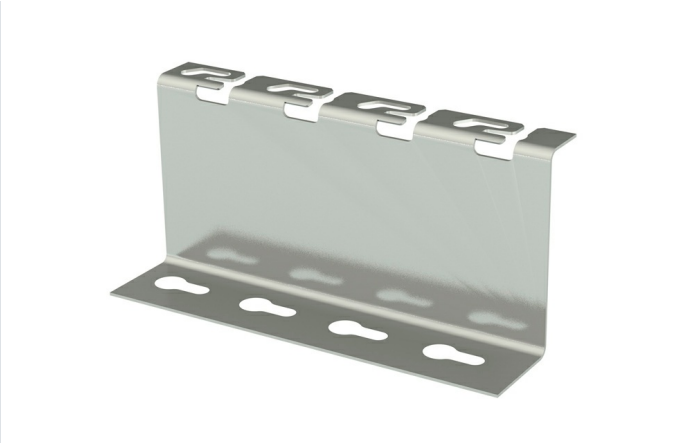

## Description

Metal support that allows the installation of Rejiband® and Pemsaband® trays to the floor or wall. Of 100 mm height, Width 100 mm, With INOX protection system, I316L finish. Click system for quick connection of wire mesh trays without any fixings and a stand off height of 100 mm. Manufactured in stainless steel AISI 316.

## Advantages

Suitable for installation in the Food industry. Due to its height of 100 mm the process of cleaning between the installation and the wall or floor surfaces is much easier.

Facilitates handling and vertical installation of Rejiband wire mesh tray by positioning it in the click pin system.

Allows the installation of the tray at a distance of 100 mm from the wall or floor.

Universal mounting system compatible with wire mesh trays by means of the Quick mount Click system without the need of screws or with sheet metal trays by using screws and the configuration of L-shaped M6/M8 holes.

## Applications

Main use is for the Food Industry. Suitable for horizontal and vertical installations of Rejiband® and Pemsaband® trays as well as in false floor installations.

## Solutions

FOOD INDUSTRY RENEWABLE ENERGIES



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Stand off Bracket Click 100 ( Ref: 67060560 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC000022 | **u** | 10 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 1,041 | **Material** | Acero inoxidable AISI 316L |
| **Protection System** | INOX | **SWL (kg)** | 250 |
| **Finish** | Stainless Steel AISI 316L | **Working temperature range (°C)** | -50 / 150 ºC |
| **Resistance Class** | Class 9D | **Fire resistance** | A1 No combustible |
| **Flange (mm)** | 100 | | |
| **Width (mm)** | 100 | | |
| **kg/u** | 0,196 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."