
Supports Technical Floors

30/10/2026

Stand off Bracket Click 100 (Ref: 67060564)

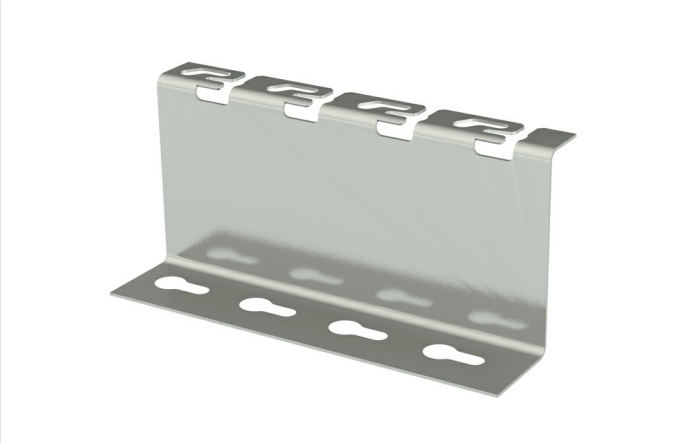

Description

Metal support that allows the installation of Rejiband® and Pemsaband® trays to the floor or wall. Of 100 mm height, Width 300 mm, With INOX protection system, I316L finish. Click system for quick connection of wire mesh trays without any fixings and a stand off height of 100 mm. Manufactured in stainless steel AISI 316.

Advantages

Suitable for installation in the Food industry. Due to its height of 100 mm the process of cleaning between the installation and the wall or floor surfaces is much easier.

Facilitates handling and vertical installation of Rejiband wire mesh tray by positioning it in the click pin system.

Allows the installation of the tray at a distance of 100 mm from the wall or floor.

Universal mounting system compatible with wire mesh trays by means of the Quick mount Click system without the need of screws or with sheet metal trays by using screws and the configuration of L-shaped M6/M8 holes.

Applications

Main use is for the Food Industry. Suitable for horizontal and vertical installations of Rejiband® and Pemsaband® trays as well as in false floor installations.

Solutions

FOOD INDUSTRY RENEWABLE ENERGIES

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Stand off Bracket Click 100 (Ref: 67060564)

Product data

ETIM 10	EC000022	**u**	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	2,899	**Material**	Acero inoxidable AISI 316L
Protection System	INOX	**SWL (kg)**	250
Finish	Stainless Steel AISI 316L	**Working temperature range (°C)**	-50 / 150 ºC
Resistance Class	Class 9D	**Fire resistance**	A1 No combustible
Flange (mm)	100		
Width (mm)	300		
kg/u	0,546		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."