


Earth Continuity Connector

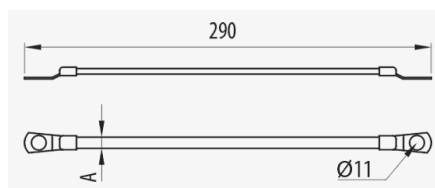

Description

Copper braided connector to provide electrical continuity in terminated sections of trays.

Advantages

Suitable for bonding all ranges of trays.

Available in two sizes: 12 mm² and 16 mm².

Electrical continuity guaranteed according to standard IEC61537.

Applications

Suitable for connection between continuous lengths of Rejiband® wire mesh trays, ensuring electrical continuity.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics				
 LTN	 10	 Brass	 -50 / 150 °C	ETIM 10 EC002935


Product data		
Ømm	Ref	kg/u
12	68000036	0,014
16	68000037	0,020

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass
 Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Earth Continuity Connector

Product applications

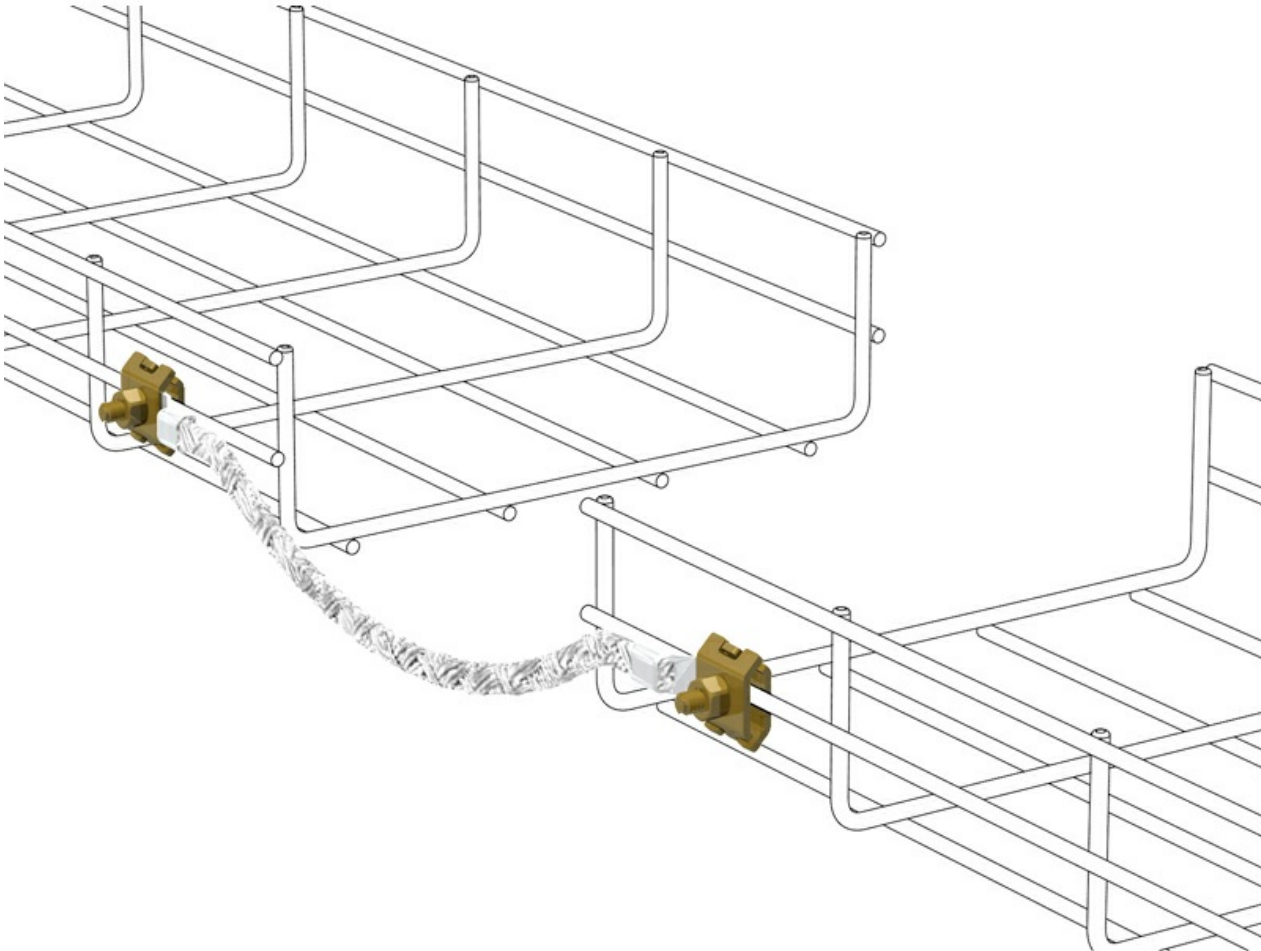

Earth Continuity Connector

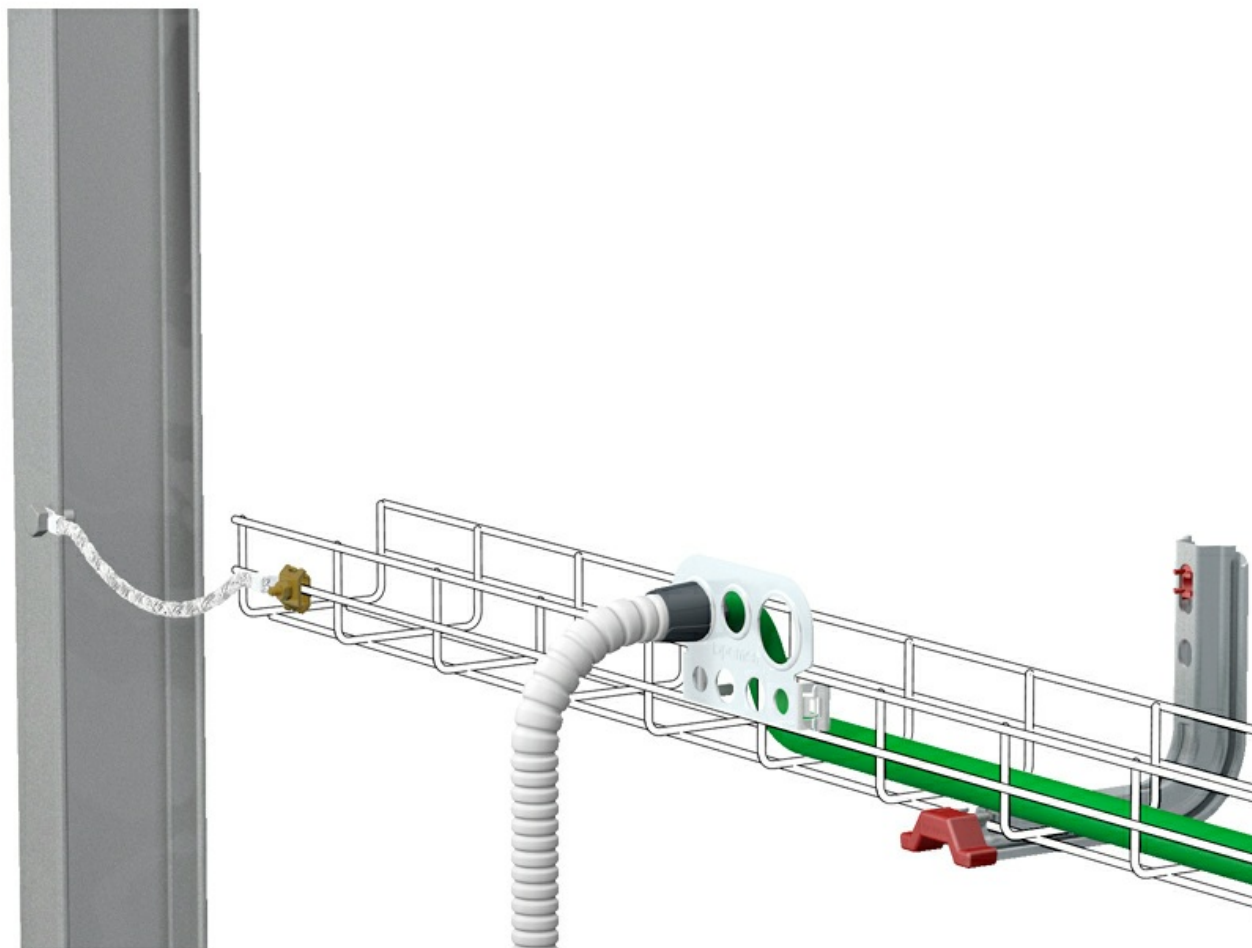

Earth Continuity Connector

