

28/03/2024

1/5

Base Entry Rejiband Pemsaband



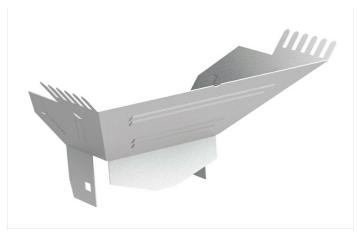











Metal accessory to create a vertical branch from a Rejiband® tray to a Pemsaband tray. Available in two sizes and two Protection Systems.

Advantages

Quick-connect click-fit system with no screws required to connect to the Rejiband® tray.

Complete view of the whole installation.

Prevents damage to the cables when making the joint.

Electrical continuity guaranteed according to standard IEC61537.

Applications

Suitable for the vertical drop from Rejiband® tray to Pemsaband® sheet trays for the protection of cables in Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions















Base Entry Rejiband Pemsaband

28/03/2024

2/5

Main technical characteristics

100, 150

🐮 -50 / 150

A1 No combustible

EC002935

Product data

S	Class IEC 61537		ReF	kg/u
PG	Class 3	100	70027100	0.173
PG	Class 3	150	70027150	0.234
GC	Class 5	100	70037100	0.227
GC	Class 5	150	70037150	0.306

S Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

[®] Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic












3/5

Assembly Accessories

28/03/2024

Base Entry Rejiband Pemsaband

Product applications

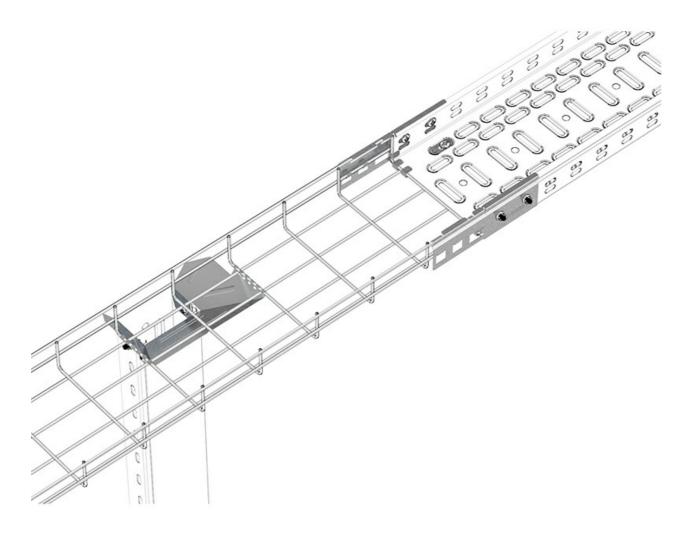













28/03/2024

Base Entry Rejiband Pemsaband













28/03/2024

5/5

Base Entry Rejiband Pemsaband









