


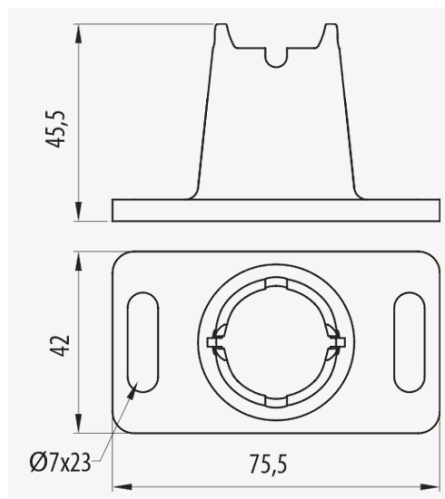

Description

Rejiband® accessory intended for the support of the Rejiband® wire mesh tray in installations on technical floors with a height of 40 mm. Press fit thanks to the Click system that allows a quick installation on Rejiband®. Made of red polystyrene.

Advantages

Installation in raised floors.

High safety material, flammability V0 according to UL94 for black references.

It allows for raising the height from 40 mm up to 73 mm by stacking a maximum of two supports.

It can be fixed with adhesive (ref. 68000066) or screwed to the floor.

Fast mount Click system.

Applications

Suitable for the installation of trays in raised floors and used for the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



Product data

ETIM 10	EC000022	SWL (kg)	40
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Working temperature range (°C)	-15 / 90 °C
Colour	Black RAL 9005	Fire resistance	NO PROPAGADOR DE LA LLAMA,GRADO UL94: V0
kg/u	0,022		
u	100		
Material	Plastic		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

