

Description

Wire mesh tray made of steel with quick-connect Click system and rounded safety edge for the support and management of cables. Of 60 mm height, Width 600 mm, With BK8 protection system. The Rejiband® Rapide Cable Tray is made up of wire mesh rods that provide high strength and elasticity. Easy to assemble, thanks to its flexibility and its quick-connect Click system, it allows the connection between sections of trays without the need for screws, which means savings in material and labour costs. Manufactured according to international standard IEC 61537. It is distributed in different sizes and in several Protection Systems.

Advantages

Flange heights of 60 or 100 mm and widths of 60, 100, 150, 200, 300, 400, 450, 500 and 600 mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Electrical continuity guaranteed according to standard IEC61537.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rapid connection system with pre-fitted couplers reduces installation time by 40%.

Applications

Rapid installation of wire mesh trays for the Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

Solutions



INDUSTRIA QUIMICA FARMACEUTICA



INDUSTRIA PETROQUÍMICA



ENERGÍA



FOTOVOLTAICA



CENTROS DE DATOS



EDIFICACIÓN. Terciario



TUNELES. INFRAESTRUCTURAS



RESISTENCIA AL FUEGO



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."
















Product data			
Protection System	BK8	u	6
Finish	BLACK C8	Material	Steel with surface coating
Resistance Class	Class 8	Impact Strength (J)	20 J
Flange (mm)	60	Section (mm2)	29780
Width (mm)	600	Working temperature range (°C)	-50 / 150 °C
Length (m)	3	Fire resistance	A1 No combustible
kg/u	2.856		



Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

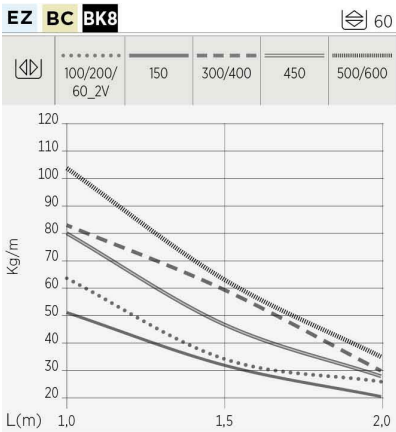
Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic




















Load diagrams





EZ		BC	BK8
			mm²
60		60	2.520
		100	4.420
		150	6.783
		200	9.333
		300	14.050
		400	19.050
		450	21.500
		500	24.050
	600	29.050	

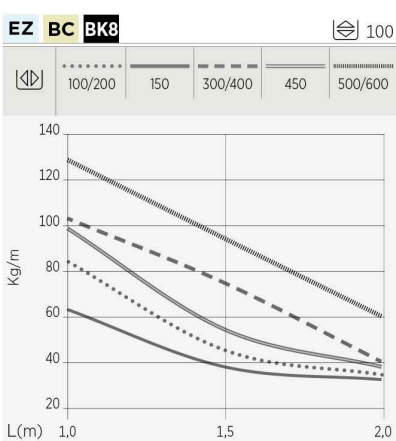Valores certificados por: 
Values certified by: 
Valeurs certifiées par:
Valores certificados por:



EZ		BC	BK8	
				mm²
100			100	7.462
			150	11.562
			200	16.290
			300	25.290
			400	34.290
			450	39.396
			500	43.290
		600	52.290	

Valores certificados por: 
Values certified by: 
Valeurs certifiées par:
Valores certificados por:

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



