


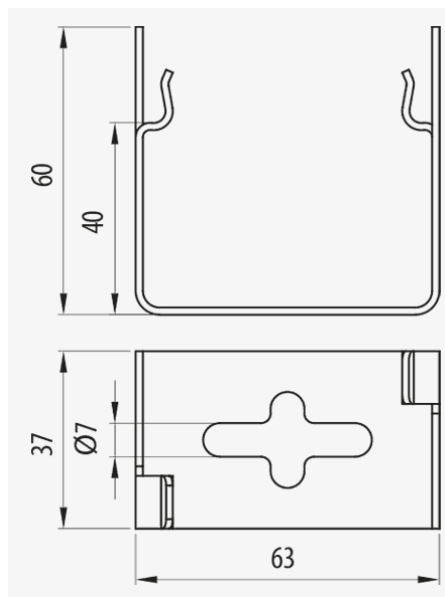

Description

Support in steel used for the ceiling installation of Rejiband® wire mesh tray with a height of 35 and 60 mm and widths of 60, 100 and 150 mm. With EZ protection system, EZ3 finish. Quick assembly thanks to the Click system of connection without the need of screws. Permissible working load up to 10 kg. Available in various Protection Systems.

Advantages

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

It allows the introduction of cables into the tray from the side.

For wall installation, use the side holes to secure with a M6 or M8 screw or bolt.

For ceiling installation, use M6 or M8 threaded rod connected through the centre of the bracket.

Fast mount system without the need for screws. Folding the fixing clips secures the tray.

Applications

Suitable for wall and ceiling mounting of the Rejiband® 35x60 and 60x60 mm wire mesh tray.

Solutions



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		EZ	
Finish		EZ3, Electrogalvanised	
Resistance Class		Class 3	
kg/u		0,067	
u		10	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS

PVC

PP

PA6

PA12

PU

PE

NBR

PET

TPV

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

